

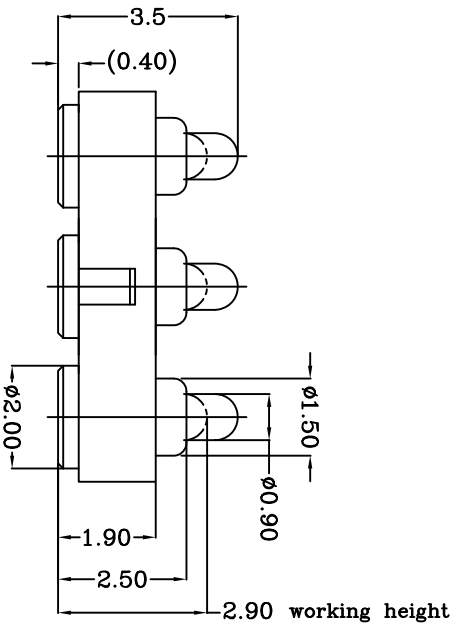
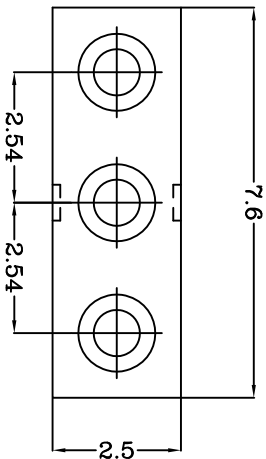




TOP-LINK

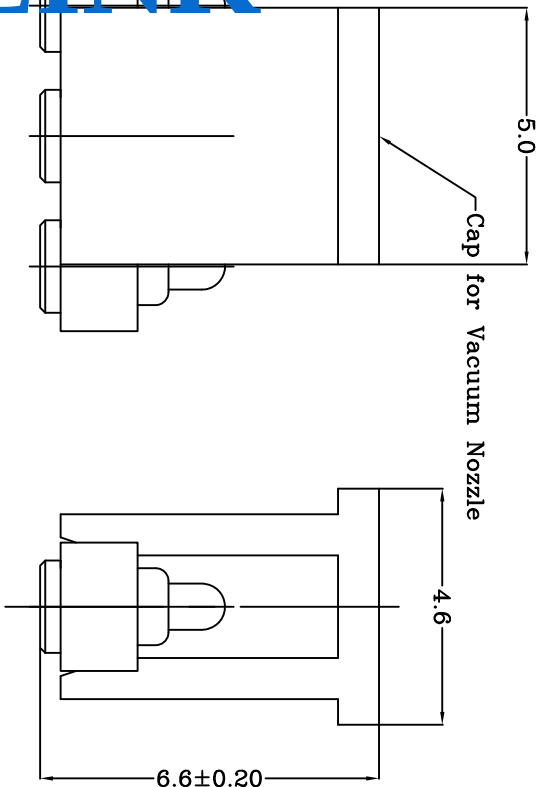

Recommended Solder paste thickness is 0.10 mm
Recommended PCB Layout

- Notes:
- 1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.
Contact: Brass
 - 2 Mechanical demands:
Plating Plunger: 0.4um Au over 1.4um Ni
Plating Body: 0.1um Au over 1.4um Ni.
 - 3 Mechanical
1) Total stroke : 0.8mm
2) Force: 100±30gf at 0.6mm stroke.

LOC
-
DIST
-

Update		2013/03/09
NEW		2009/01/15
REVISION		
RECORD		
APVD		
DATE		

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 3.2/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN	APVD	Lansing	Top-Link
CHK	REL	Electronics	Electronics Ltd.
Andy			
NAME BATTERY POGO CONNECTOR 3 POSITIONS			
PGC-1.5-3.5-R-3P-2.54PH			
SCALE	A4	DWG NO.	C-100282
1:1			
SHEET			REV
1 OF 1			A.1

100282-3
PART NUMBER

USED ON

-