



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.





DWG NO.
C-100324

LOC
-
DIST
-

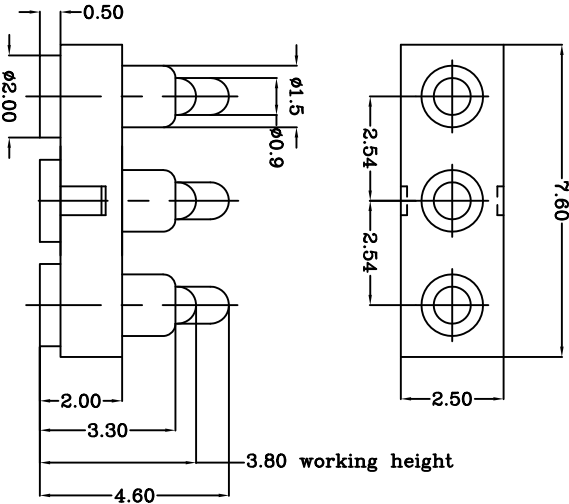

Notes:
1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.
Contact: Brass
2 Mechanical demands:
Spring force: Min 0.2N with 0.5mm stroke
0.8 +0.60N/-0.20N with 0.8mm stroke.
Full stroke: 1.3mm
Plating Plunger: Min 0.4um Au over 1.4um Ni
Plating Body: Min 0.1um Au over 1.4um .

TOP-LINK

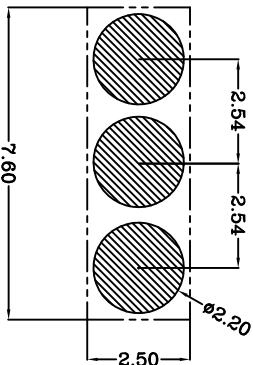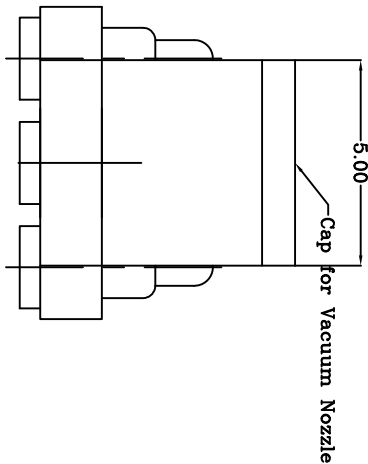

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL				HT TR				FIN			
0	= ±			0.0	= ±0.10			DWN				APVD			
0.00	= ±			0.00	= ±			CHK				REL			
0.000	= ±			0.000	= ±			Jim							
ANGLE: ±1°				NAME				BATTERY POGO CONNECTOR				Top-Link Electronics Ltd.			
SURF TEXTURE: 3.2/				SCALE				1:1				A4			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				DO NOT SCALE PRINT				DWG NO. C-100324				3 POSITIONS			

100324-3
PART NUMBER

USED ON