
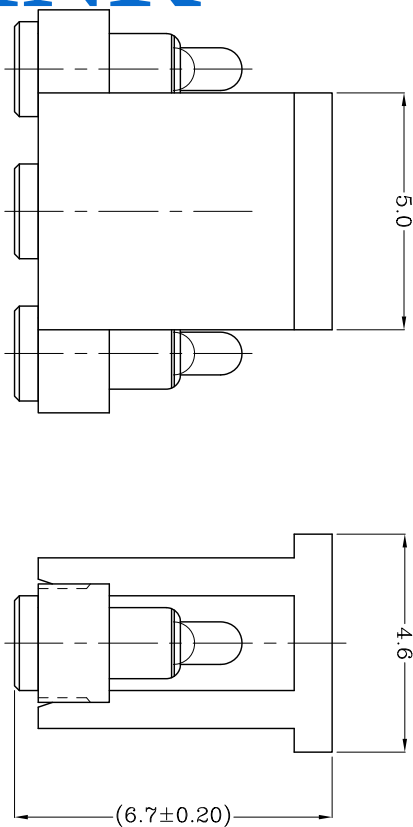
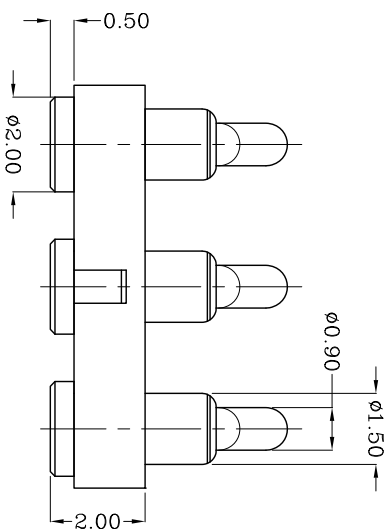
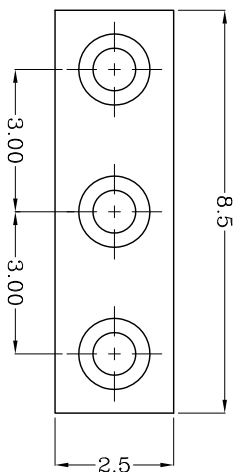


Recommended PCB Layout

Notes:
1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black.

CONTACT: BRASS

2 Mechanical demands:
Plating Plunger: Min 0.04um Au over 1.4um Ni
Plating Body: Min 0.1um Au over 1.4um Ni.

3 Electrical

a)Contact resistance: 30mOhm Max.
b)Current rating: 2.0A
c)Operating voltage: 36VDC
d)Force:15±30gf per pin at 1.00mm stroke

LDC	-
DIST	-

	NEW		2012/05/25
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM		MATL	HT	TR	FIN
TOLERANCES UNLESS OTHER SPECIFIED			—		
0	= ±—	DWN	APVD		
0.0	= ±0.15	QIN			
0.00	= ±0.10	CHK	REL		
0.000	= ±				
ANGLE: ±1°					
SURF. TEXTURE: 32/ 					
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX					
DO NOT SCALE PRINT					
SCALE		A4	DWG NO.	C-100418	SHEET 1 OF 1
1:1					REV B
NAME POGD 3P PGC-1.5-5.0-R-3P-3.0PH					
<i>Top-Link</i> <u>Electronics</u> Top-Link Electronics Ltd.					

100418-3
PART NUMBER