


DWG NO.
C-100424



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC	-
DIST	-

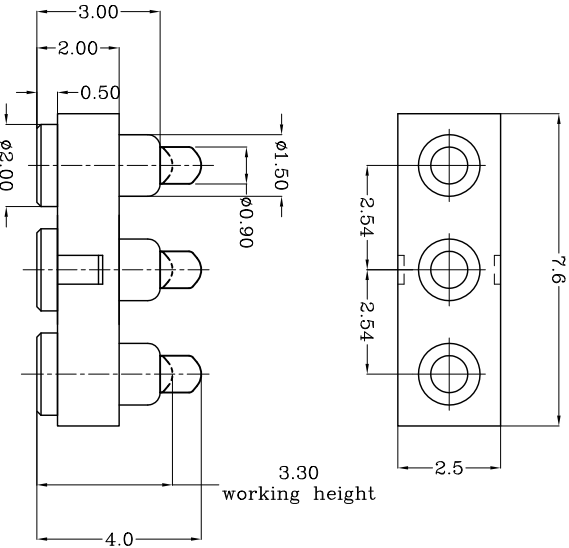

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black.
 - 2 Contact: Brass
 - 3 Mechanical demands:
Plating Plunger: 0.4um Au over 1.4um Ni
Plating Body: 0.1um Au over 1.4um Ni.
- 3 Mechanical:
- 1) Force: 110±30gf per pin at 0.7mm stroke
 - 2) Total stroke: 0.90mm
 - 3) Durability: 10,000 cycle min.

TOP-LINK

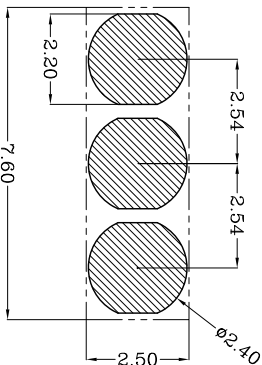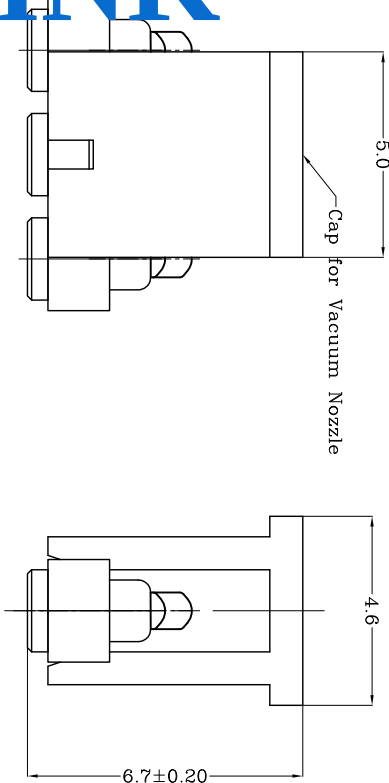

Recommended PCB Layout

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL				HT TR				FIN			
0	= ±			0.0	= ±0.15			DWN		APVD					
0.00	= ±0.10			CHK						REL					
0.000	= ±														
ANGLE: ±1°				NAME				BATTERY				POGO CONNECTOR 3 POSITIONS			
SURF TEXTURE: 32/				SCALE				A4				DWG			
REMOVE BURRS, BREAK				1:1				ND				C-100424			
SHARP EDGES R0.05 MAX															
DO NOT SCALE PRINT															

USED ON

-

100424-3

PART NUMBER

Top-Link
Electronics Ltd.

A

B

C

D

4

3

2

1