

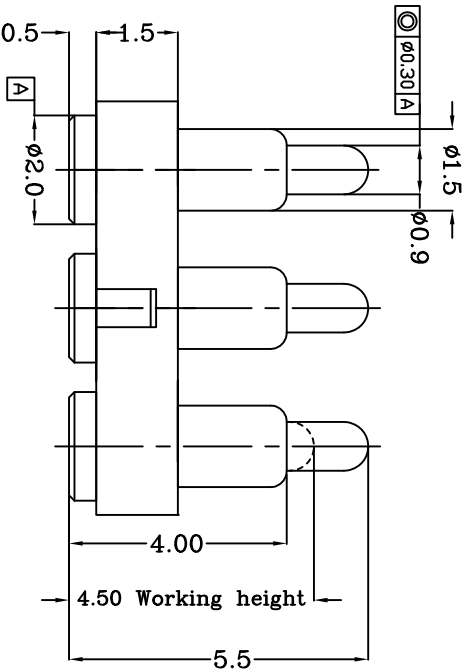


proposal

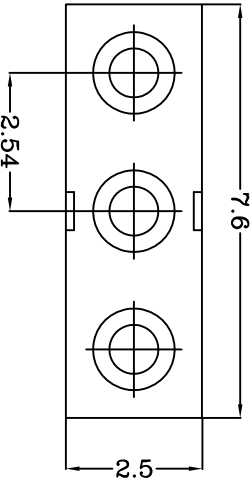

- Notes:
- 1 Demensions shall be interpreted per ASME Y14.5M.
  - 2 Mechanical performance(See the table 1)
  - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
  - <2.2>Warning: Working height are not permitted to be less than Min working height.
  - 3 Electrical performance
  - Resistance: 50mOhm Max.Current rating: 2.0A
  - 4 Packaging Spec.Comformance to EIA 481
  - 5 RoHS compliant.

TOP-LINK

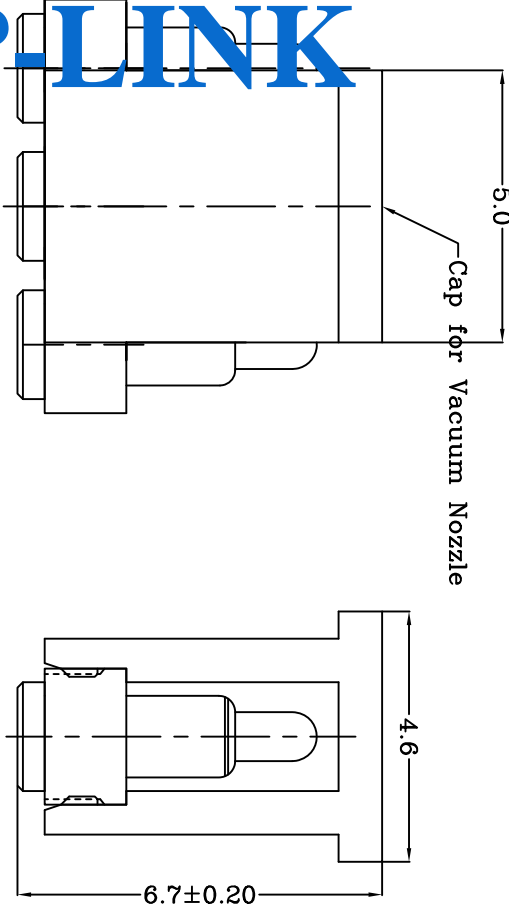

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Table 1 Mechanical performance		
Working height	4.50mm	75±25gf <2.1>
Durability	10000cycle	

100774-3  
PART NUMBER

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm			
0.0 = ±0.15		DWN:	APVD:			
0.00 = ±0.10		CHK:	REL:			
0.000 = ±0.005		Angle: ±1°				
SURF. TEXTURE:		Name	Customer drawing			
REMOVE SHARP EDGES		Scale	Size	DWG No.		
BREAK MAX/DO NOT SCALE PRINT.		1:1	A4	C-100774		

Top-Link Electronics  
Electronics Ltd.

DIST  
---

Rev.	Revision record.	Date.
	NEW	2011/12/28