

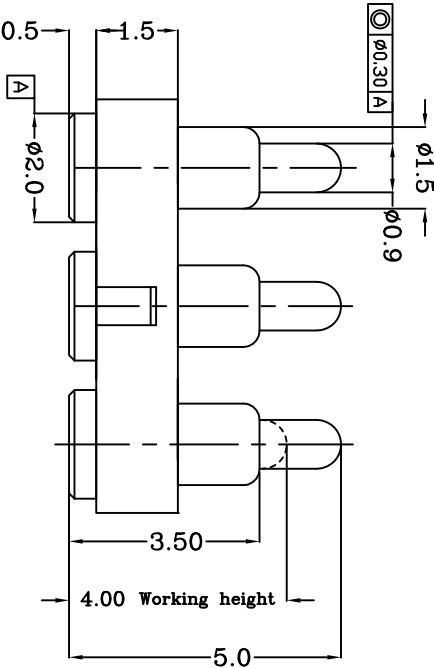


proposal

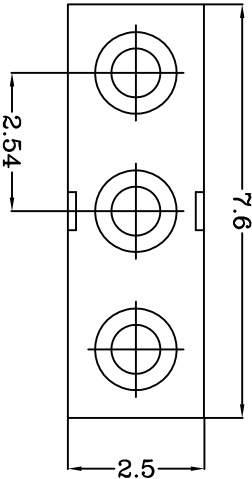

- Notes:
- 1 Demensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
Resistance: 200mOhm Max.Current rating: 1.0A
 - 4 Packaging Spec.Comformance to EIA 481
 - 5 RoHS compliant.

TOP-LINK

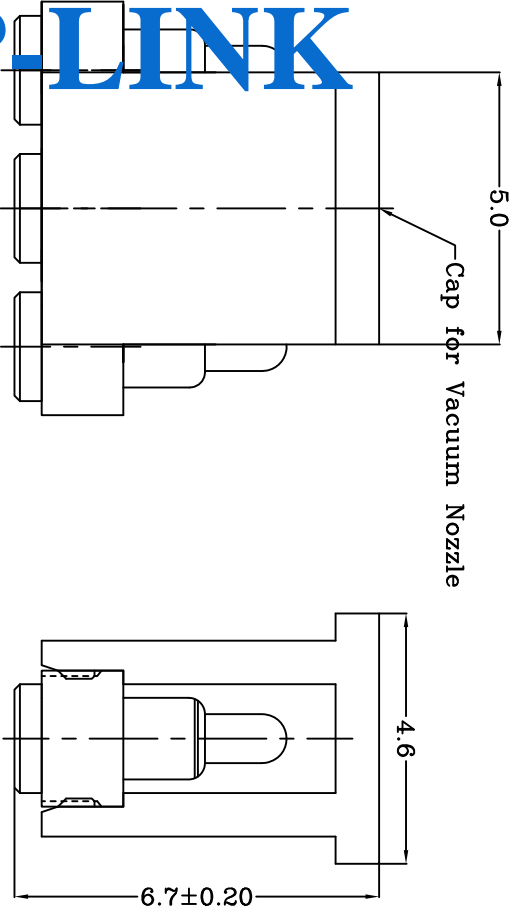

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Table 1 Mechanical performance		
Working height	4.00mm	35±15gf <2.1>
Durability	10000cycle	

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin Zuozhong	APVD:			100782-3
0.0 = ±0.15		CHK:		REL:			
0.00 = ±0.10		Name					Top-Link Electronics Ltd.
0.000 = ±0.05		Customer drawing					
SURF. TEXTURE:		Scale	Size	DWG No.		Page	Rev.
REMOVE SHARP EDGES		1:1	A4	C-100782		1/1	1
BREAK SHARP EDGES							
SCALE PRINT.							

DIST

Rev.	NEW	Date.
Revision record.		