


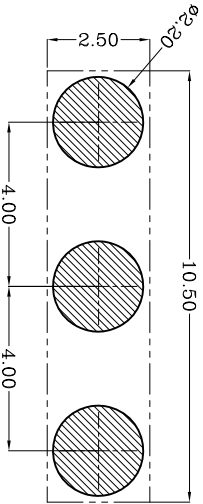
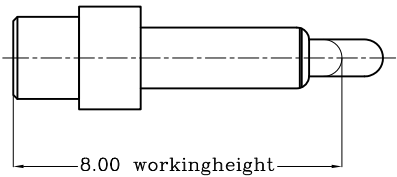


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

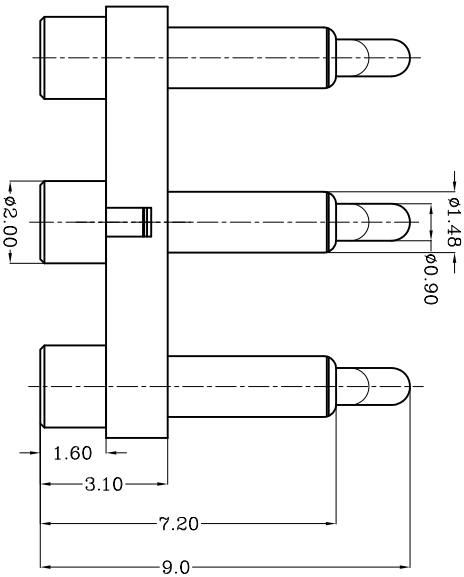

DWG NO.
C-110755

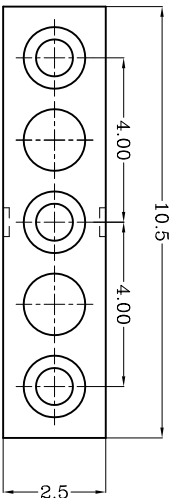

Recommended PCB Layout

TOP-LINK

Notes:

Material(材质):

1)Body : Brass

2)Plunge : Brass

3)Spring :Stainless steel wire

2 Plating(电镀):

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

Mechanical(机械性能):

1)Total stroke(总行程) : 1.50mm

2)Durability(寿命): 10,000 cycle min.

Electrical(电性能)

1)Contact resistance(接触抵抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

USED ON

-

110755-3
PART NUMBER

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±	0.0	= ±0.15	DWN	APVD	HT TR	FIN
0.00	= ±0.10	CHK	REL	REL	REL	REL	REL
0.000	= ±	NAME	POGO PIN CONNECTOR 3 POSITIONS	NAME	POGO PIN CONNECTOR 3 POSITIONS	NAME	POGO PIN CONNECTOR 3 POSITIONS
ANGLE: ±1°		SCALE	1:1	A4	DWG NO.	C-110755	SHEET 1 OF 1
SURF TEXTURE: 32/		REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX					
DD NOT SCALE PRINT							

Top-Link Electronics Ltd.

A

B

C

D

4

3

2

1