



DWG NO. C-200014

POINT OF MEASUREMENT — PICK&PLACE AREA

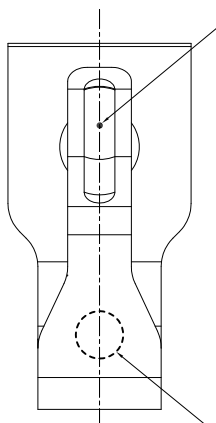

-PICK&PLACE AREA



NOTES

1. MATERIAL:
COPPER ALLOY, THICKNESS=0.15.
2. PLATING:
1.25um(50u"Min Ni UNDER PLATING,
0.025um(1u"Min Au PLATING OVER ALL

3. SPECIFICATION:


- ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 1.0A,
VOLTAGE RATING : 50 VAC/DC,
LOW LEVEL CONTACT RESISTANCE:50mΩ MAX

3.2 MECHANICAL CHARACTERISTICS


- CONTACT NORMAL FORCE: 50gf min PER PIN AT WORKING STROKE
DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE WITHOUT DEGRADING

3.3 ENVIRONMENTAL CHARACTERISTICS

- OPERATING TEMPERATURE RANGE : -20°C TD +70°C.
4. TAPE & REEL PACKAGING PER EIA481 STANDARD.
5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009
6. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

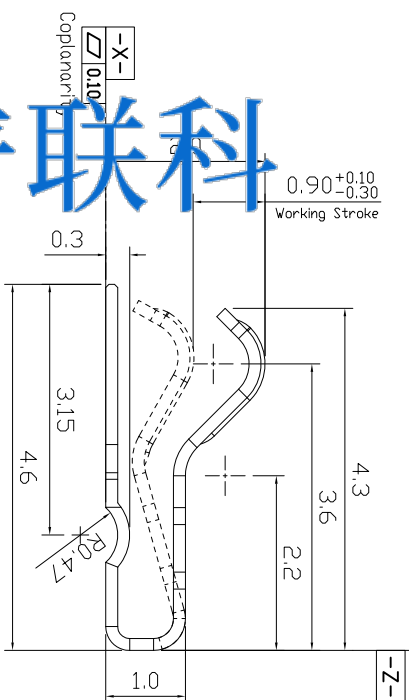


POINT OF MEASUREMENT

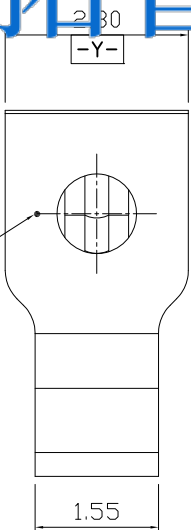

拓普联科

TOP-LINK

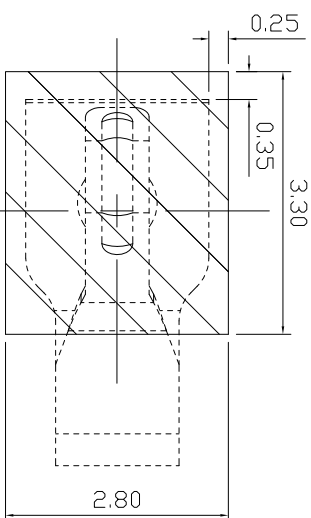

PAD OF PCB

AI	Update		2015/11/00
A	NEW		
LTR	REVISION RECORD	APVD	DATE

200014-1		2		CARRIER TAPE	P=8mm		WHITE,W=12mm,Q/V/REEL=3000 Pcs		
		1		2.0H 2.3W ANTENNA CLIPS	1Pcs		NOTES 1,2		
ASSEMBLY NUMBER		ITEM		PART NAME		QTY		DESCRIPTION	
DIMENSIONS IN MM		MATH		HT		TR		FIN	
TOLERANCES UNLESS				—				— A	
OTHER SPECIFIED		DVN		APVD					
0 = ±		Ca i worlu		Lansing				Top-Link	
0.0 = ±0.15		CHK		REL				Electronics	
0.00 = ±0.10								Electronics Ltd.	
ANGLE:		NAME							
0 = ±3°									
0.0 = ±1.5°									
REMOVE BURRS, BREAK		SCALE		DWG					
SHARP EDGES R0.10 MAX		1:1		A4		C-200014		SHEET	
DO NOT SCALE PRINT								1 OF 1	
								REV	
								A1	

USED ON

1

4

၆

2

1

A

D