



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-200015


LDC
DIST
-

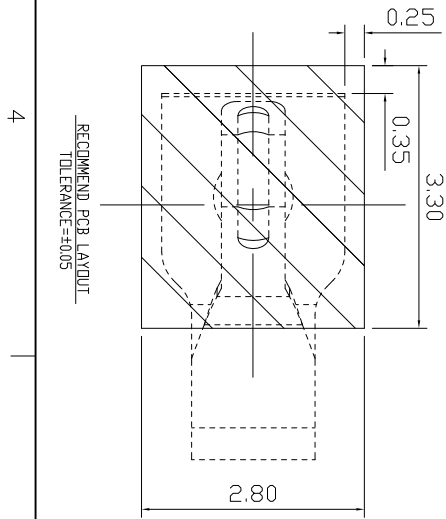

PAD OF PCB.	
A1	Update
A	NEW
LTR	REVISION RECORD
APVD	
DATE	2015/11/06


200015-1		2	CARRIER TAPE	P=8mm	WHITE=12mm,0.7y/REEL=2500 Pcs
ASSEMBLY NUMBER	ITEM	1	2.5H 2.3W ANTENNA CLIPS	1Pcs	NOTES 1,2
DIMENSIONS IN MM		TOLERANCES UNLESS OTHER SPECIFIED			
0		= ±			
0.0		= ±0.15			
0.00		= ±0.10			
ANGLE:		= ±3°			
0		= ±1.5°			
0.0		= ±1.5°			
REMOVE BURRS, BREAK SHARP EDGES R0.10 MAX		DO NOT SCALE PRINT			
MATERIAL		HT TR		FIN	
DWN		APVD		REL	
CHK		REL		REL	
NAME		REL		REL	
SCALE		SCALE		SCALE	
1:1		A4		A4	
DWG		DWG		DWG	
C-200015		C-200015		C-200015	
SHEET		SHEET		SHEET	
1 OF 1		1 OF 1		1 OF 1	
REV		REV		REV	
A1		A1		A1	

CUSTOMER DRAWING FOR 2.5H, 2.3W ANTENNA CLIPS

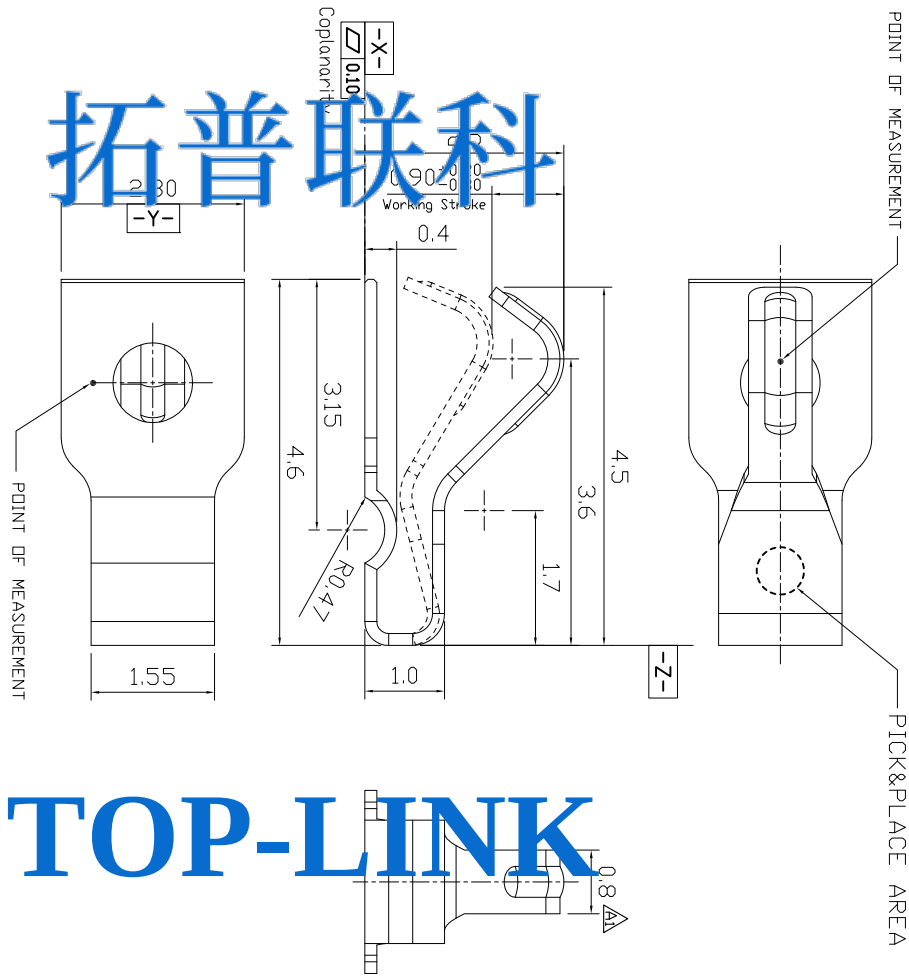

TOP-LINK

- NOTES:
1. MATERIAL: COPPER ALLOY, THICKNESS=0.15.
 2. PLATING: 125um(S0u*2)Min Ni UNDER PLATING, 0.025um(1u*2)Min Au PLATING OVER ALL.
 3. SPECIFICATION:
 - 3.1 ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING : 10A.
 - VOLTAGE RATING : 50 VAC/DC.
 - LOW LEVEL CONTACT RESISTANCE:50mΩ MAX
 - 3.2 MECHANICAL CHARACTERISTICS:
 - CONTACT NORMAL FORCE: 50gf
 - WORKING STROKE WITHOUT DEGRADING
 - 3.3 ENVIRONMENTAL CHARACTERISTICS:
 - OPERATING TEMPERATURE RANGE : -20°C TO +70°C.
 - TAPE & REEL PACKAGING PER EIA481 STANDARD.
 - 5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.
 - 6. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"



USED ON