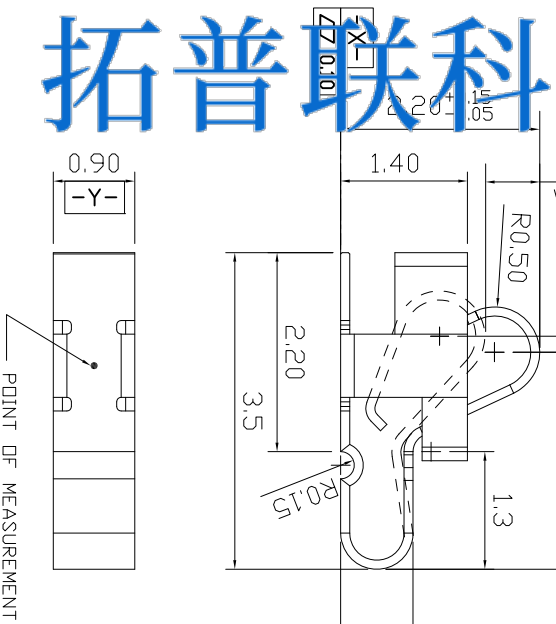
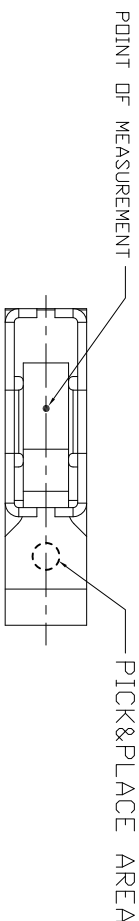



RECOMMEND PCB LAYOUT
TOLERANCE=±0.05

PAD OF PCB.

	NEW		
LTR	REVISION RECORD	APVD	DATE

200035-1		2	CARRIER TAPE	P=8mm	TRANSPARENT,W=12mm,Q'ly/REEL=5500Pcs			
1		2.2H	0.9W ANTENNA CLIPS	1Pcs	NOTES 1,2			
ASSEMBLY NUMBER		ITEM	PART NAME	QTY	DESCRIPTION			
DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATT		HT TR		FIN		
		DWN		APVD				
		CHK		REL				
		NAME		CUSTOMER DRAWING FOR 2, 2H, 0, 9W, ANTENNA CLIPS				
ANGLE: 0.0 = ±.3° 0.0 = ±1.5°		SCALE		A4	DWG NO.	C-200035	SHEET	REV
		1:1		A4	NO.		1 OF 1	A
REMOVE BURRS, BREAK SHARP EDGES R0.0 MAX DO NOT SCALE PRINT								

TOP-LINK

NOTES:

1. MATERIAL: ALLOY, THICKNESS=0.10.
COPPER
2. PLATING:
1.25um(50u")min Ni UNDER PLATING,
0.025um(1u")min Au PLATING OVER ALL

3. SPECIFICATION:
3.1 ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 10A,
VOLTAGE RATING : 50 VAC/DC,
LOW LEVEL CONTACT RESISTANCE:50mΩ MAX

3.2 MECHANICAL CHARACTERISTICS:
CONTACT NORMAL FORCE: 30gf MIN PER PIN AT
WORKING STROKE
DURABILITY : MATED 5,000 CYCLES AT WORKING STROKE
WITHOUT DEGRADING

3.3 ENVIRONMENTAL CHARACTERISTICS:
OPERATING TEMPERATURE RANGE : -20°C TO +70°C.
4. TAPE & REEL PACKAGING PER EIA481 STANDARD.
5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.
6. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"