





POINT OF MEASUREMENT
PICK&PLACE AREA

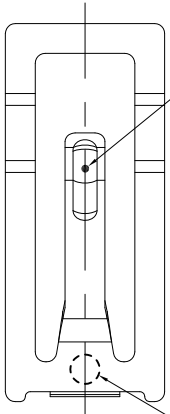

(2.7)

0.65±0.15
Working Stroke

-X-
0.10

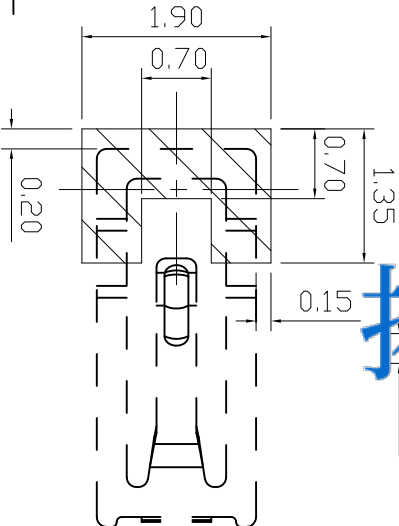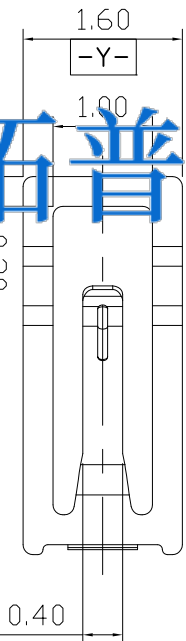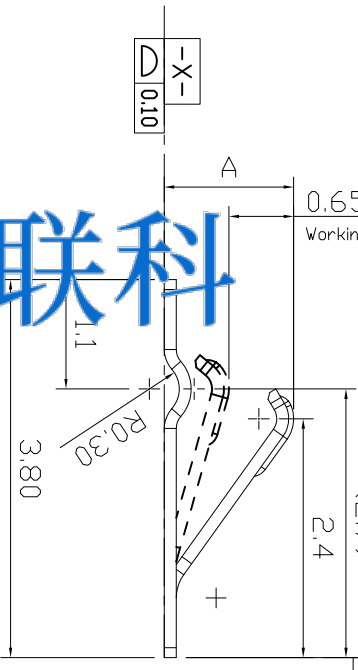


PAD OF PCB.

RECOMMEND PCB LAYOUT
TOLERANCE=±0.05

LDC
DIST

TOP-LINK



NOTES:

1. MATERIAL:

COPPER ALLOY, THICKNESS=0.12.

2. PLATING:

1.25um(50u"Min) Ni UNDER PLATING.

0.025um(1u"Min) Au PLATING OVER ALL.

3. SPECIFICATION:

3.1 ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 10A.

VOLTAGE RATING : 50 VAC/DC.

LOW LEVEL CONTACT RESISTANCE:50mΩ MAX

3.2 MECHANICAL CHARACTERISTICS:

CONTACT NORMAL FORCE: 30gf Min PER PIN AT

WORKING STROKE

DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE

WITHOUT DEGRADING


3.3 ENVIRONMENTAL CHARACTERISTICS:

OPERATING TEMPERATURE RANGE : -20°C TO +70°C.

4. TAPE & REEL PACKAGING PER EIA481 STANDARD.

5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.

6. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"



USED ON

-

200054-1		2	CARRIER TAPE	P=8mm	WHITE:W=12mm,Q/V/REEL=**** Pcs	1,6±0.15
1	1.6H 1.6W ANTENNA CLIPS	1Pcs	NOTES 1,2			
200053-1		2	CARRIER TAPE	P=8mm	WHITE:W=12mm,Q/V/REEL=**** Pcs	1,3±0.15
1	1.3H 1.6W ANTENNA CLIPS	1Pcs	NOTES 1,2			
ASSEMBLY NUMBER		ITEM	PART NAME	QTY	DESCRIPTION	DIMENSION A
DIMENSIONS IN MM		TOLERANCES UNLESS OTHER SPECIFIED				
0		= ±				
0.0		= ±0.15				
0.00		= ±0.10				
ANGLE:		= ±3°				
0		= ±1.5°				
0.0		= ±1.5°				
REMOVE BURRS, BREAK SHARP EDGES R0.10 MAX		DO NOT SCALE PRINT				
NAME		DWN	APVD	HT TR	FIN	
CHK			REL			
SCALE		1:1	A4	DWG NO.	C-200053	
CUSTOMER DRAWING FOR 1. 3&1. 6H, 1. 6W, ANTENNA CLIPS						
SHEET		1 OF 1	REV	A		

A

B

C

D

4

3

2

1