
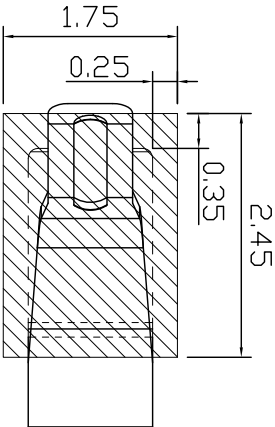





POINT OF MEASUREMENT

PICK&PLACE AREA

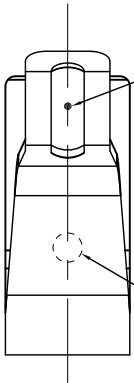


RECOMMEND PCB LAYOUT
TOLERANCE=±0.05

PAD OF PCB.

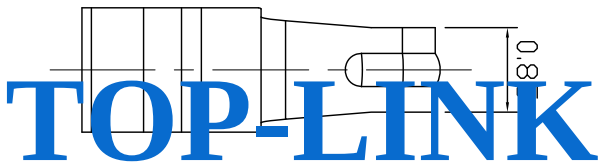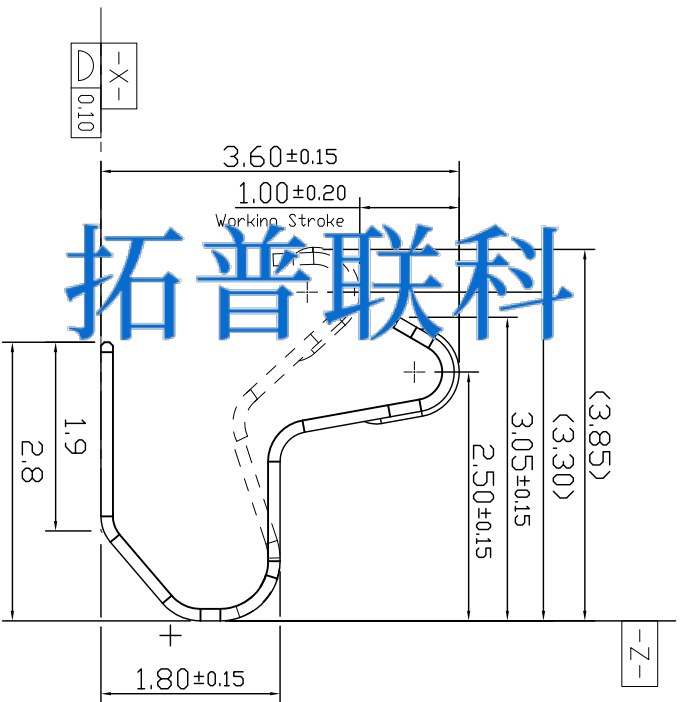

- NOTES:
1. MATERIAL:
COPPER ALLOY, THICKNESS=0.12.
 2. PLATING:
1.25um(50u"Min Ni UNDER PLATING,
0.025um(1u"Min Au PLATING OVER ALL.
 3. SPECIFICATION:
3.1 ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 10A.
VOLTAGE RATING : 50 VAC/DC
LOW LEVEL CONTACT RESISTANCE:50mΩ MAX
 - 3.2 MECHANICAL CHARACTERISTICS:
CONTACT NORMAL FORCE: 30gf Min PER PIN AT
WORKING STROKE
DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE
WITHOUT DEGRADING
 - 3.3 ENVIRONMENTAL CHARACTERISTICS:
OPERATING TEMPERATURE RANGE : -20°C TO +70°C.
4. TAPE & REEL PACKAGING PER EIA481 STANDARD.
5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.
6. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

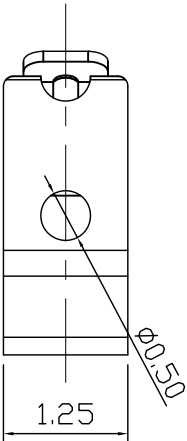

200055-1		2	CARRIER TAPE	P=8mm	WHITE.W=16mm.Qty/REEL=2000 Pcs	
1		3.6H 1.25W ANTENNA CLIPS	1Pcs	NOTES 1,2		
DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL	1	HT TR	FIN	
0 = ±		DWN	Kent	APVD	Top-Link Electronics Ltd.	
0.0 = ±0.15		CHK	REL			
0.00 = ±0.10						
ANGLE: 0 = ±3° 0.0 = ±1.5°		NAME				
CUSTOMER DRAWING FOR 3.6H, 1.25W, ANTENNA CLIPS						
REMOVE BURRS, BREAK SHARP EDGES R0.10 MAX DO NOT SCALE PRINT		SCALE	1:1	A4	DWG NO.	C-200055
					SHEET	1 OF 1
					REV	A

Top-Link
Electronics Ltd.

USED ON

-