


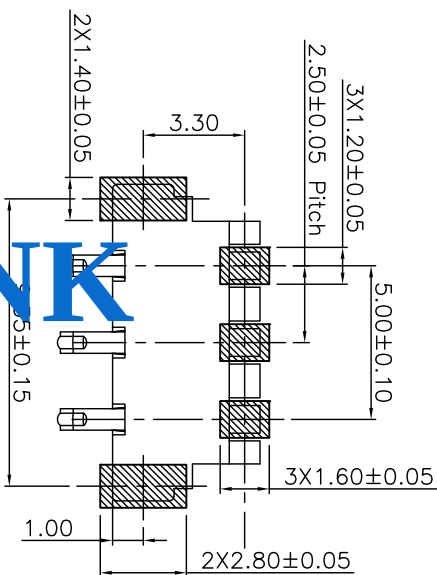
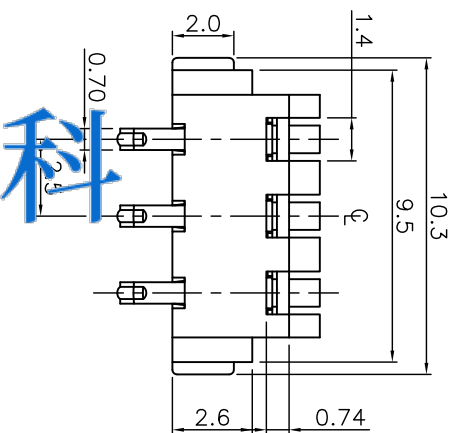
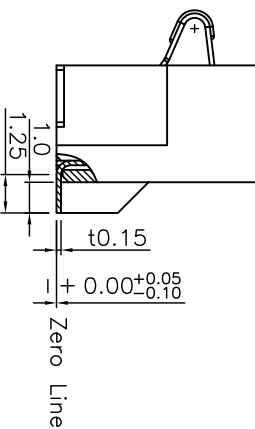


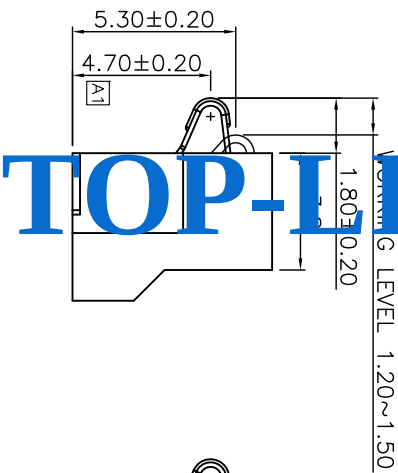

RECOMMENDED P.C.B LAYOUT (Component Side)

USED ON

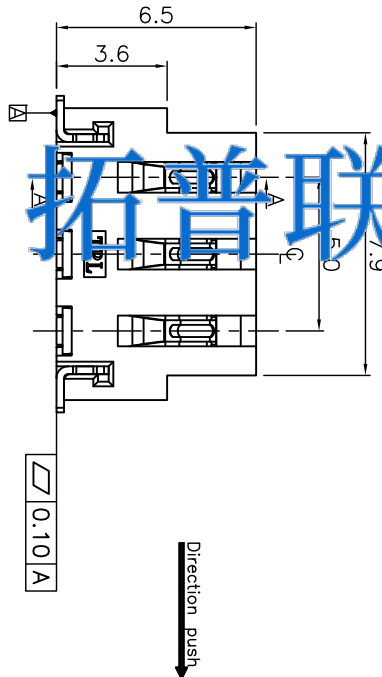

SECTION A-A

200001-3

PART NUMBER

Notes

1. material: plastic: LCP (UL94V-0), color black
terminal: beryllium copper (C1720 HM)

2. electrical specifications:
voltage rating: 12V DC min
current rating: 2.0A min
dielectric strength: 500V AC for 1 minute 1 mA
insulation resistance: 1000 meg ohm min
contact resistance: 30 mill. ohm max
operation temperature: -40° to +105°
product withstanding reflow soldering 260° for 10s

3. mechanical specifications:

LDC
-
DIST
-

A1	Update		2013/06/04
A	NEW		2007/08/14
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0	= ±-
0.0	= ±0.15
0.00	= ±0.10
0.000	= ±-

ANGLE: ±1°

SURF TEXTURE: $\sqrt{32}$

REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	—	HT TR	—	FIN	—	✓
DWN	Qin	APVD	<i>Top-Link</i> Electronics Top-Link Electronics Ltd.			
CHK		REL				
NAME 2.50 Pitch Spring Battery Connector						
SCALE	A4	DWG NO.	C-2000001	SHEET	1 OF 1	REV
4:1						A1