




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101127

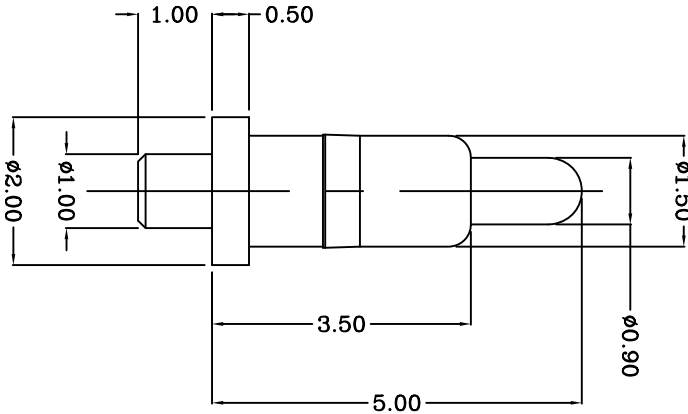

TOP-LINK

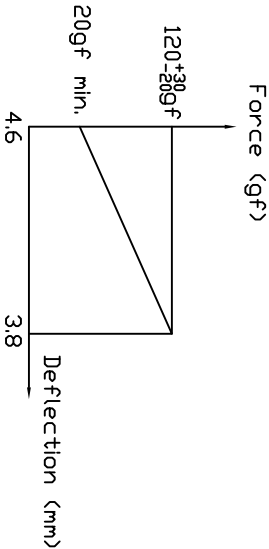

Notes:

- Material:
1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
2)Spring : Stainless steel wire
2 Plating
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
3 Mechanical
1)Total stroke : 1.3mm
2)Durability: 10,000 cycle min.
4 Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC

USED ON

-

LDC
-
DIST
-

update	8013/09/07
New	8007/11/07
REVISION RECORD	APVD
DATE	

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	1	HT TR	-	FIN	-
DWN	Benny	APVD	Lansing	Top-Link Electronics Ltd.	Top-Link Electronics Ltd.
CHK	Andy	REL			
NAME	POGO PIN				
SCALE	1:1	A4	DWG NO.	C-101127	SHEET 1 OF 1
REV	A.1				

101127-1

PART NUMBER

A

B

C

D

4

3

2

1