USED ON
—

DWG NO. C-101170



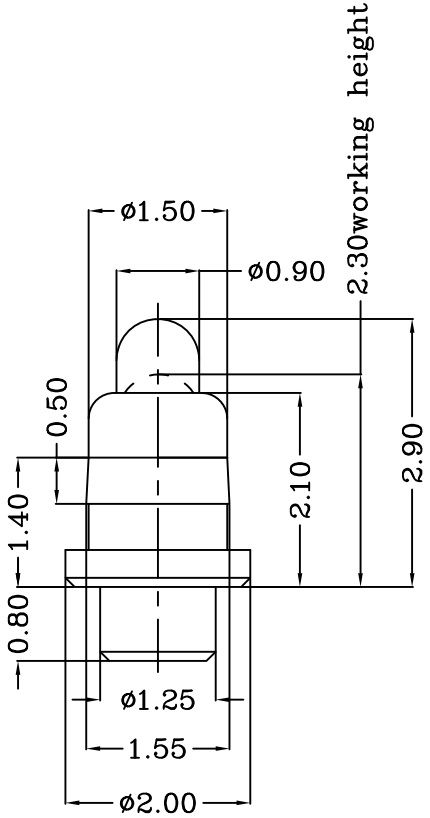

Notes:

1 Material:
1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
2)Spring : Stainless steel wire

2 Plating
1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical
1) Total stroke : 0.7mm
2)Durability: 10,000 cycle min.
3)Spring Force: 108±22gf .

4 Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC

TOPLINK

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LOC	DIST
-	-

LTR	REVISION RECORD	APVD	DATE
	更换弹簧及弹力规格		2008/07/09
	NEW		2008/03/19

DIMENSIONS IN MM
TOLERANCES UNLESS OTHER SPECIFIED
0 = ±-
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±-
ANGLE: ±1°
SURF TEXTURE: 3.2
REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL 1	HT TR —	FIN —	
DWN Qin	APVD	Top-Link Electronics Ltd.	
CHK	REL		
NAME POGO PIN PG-1.0-0.8-1.5-2.1-2.9			
SCALE 1:1	A4	DWG NO. C-101170	SHEET 1 OF 1	REV B

101170-1
PART NUMBER