


proposal

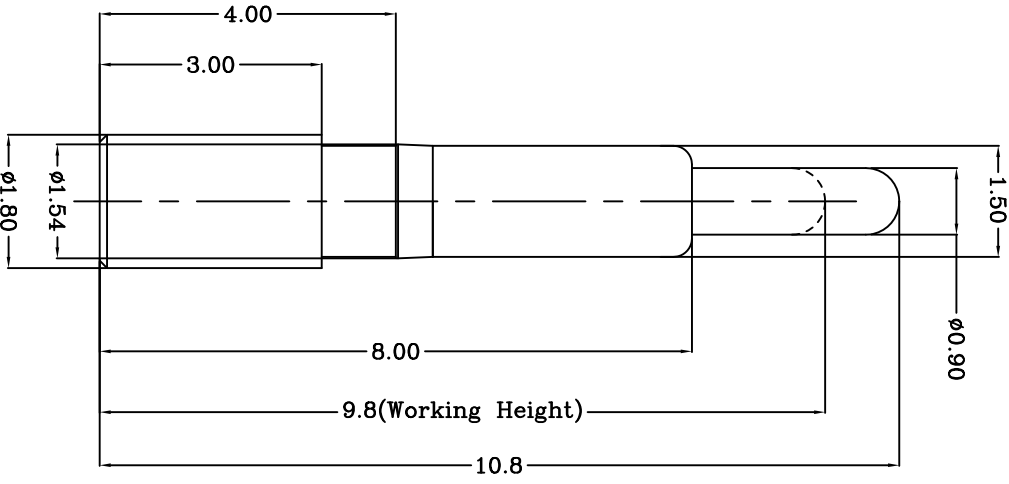

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 2.5um
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
working height	9.8mm	120gf Min
Durability	10000cycle	

Not

1 Dempnsons shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.

3 Electrical performance

Resistance: 30mOhm Max.Current rating: 2.0A

4 RoHS compliant.

TOP LINK

DIST

Update	2012/09/17
NEW	2008/04/07
Revision record.	Date.

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Cai wonlu	APVD:		
0.0 = ± 0.15	CHK:		REL:		
0.00 = ± 0.10	Angle: ± 1°				
0.000 = ± 0.005	SURF. TEXTURE:				
	REMOVE SHARP EDGES				
	BREAK SHARP EDGES				
	SCALE PRINT:				

Name	POGO PIN	Scale	1:1	Size	A4	DWG No.	C-101184	Page	1/1	Rev.	B
------	----------	-------	-----	------	----	---------	----------	------	-----	------	---

101184-1	PART NUMBER
----------	-------------