

proposal

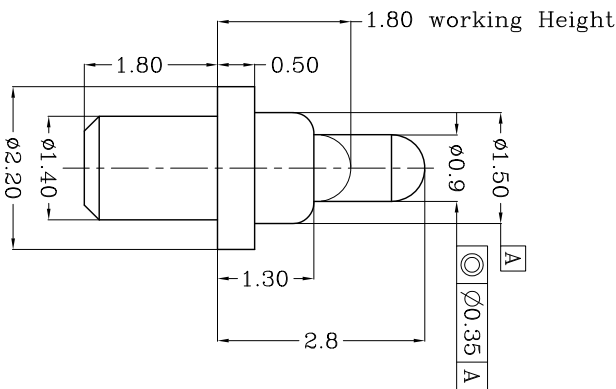


Table 1 Mechanical performance	
Working height	1.80mm
Durability	10000cycle

Item	Part name	Qty/Ea	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating over Ni 1.4um
2	Punger	1	Leaded Brass	Au 0.4um plating over Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Not

1 Demrnsions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.> Steel force is the average of forces obtained when plunger goes downwards and upwards.

<2.> Total stroke : 1.1mm.

3 Electrical performance

Resistance: 30mOhm Max.Current rating: 2.0A

4 Rensocompliant.

working height	1.80mm	100±25gf <2.1>
Durability	10000cycle	

Top-Link Electronics Ltd.	Type	Unit	Weight
	Customer drawing	mm	

TOLERANCES UNLESS OTHER SPECIFIED	DPW:	APVD:
0	Qin zuozhong	
± 0.05		
± 0.00	CHK:	REL:
± 0.10		

top-link
Electronics

Top-link
Electronics Ltd

U-000=41	Name
Angle: 41	POGO PIN
SURF TEXTURE:	
REMOVE BURRS.	
0.000	

BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.	Scale 1:1	Size A4	DWG No. C-101266	Page 1/1	Rev. D
---	--------------	------------	---------------------	-------------	-----------