


DWG NO.
C-101267

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC	-
DIST	-

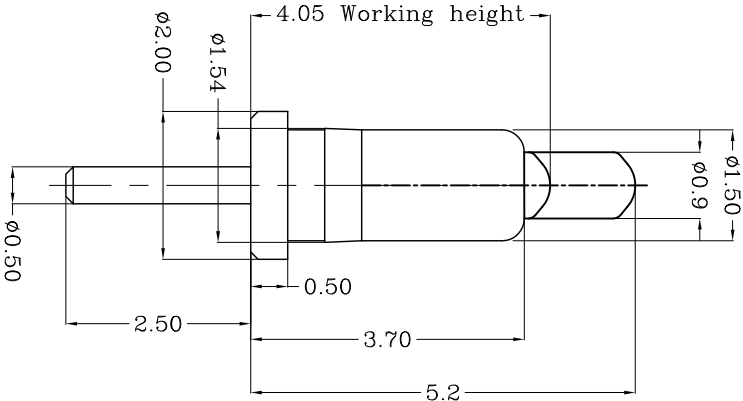

TOP-LINK

Notes:

△ Material(材质):

1) Body : C36000

2) Plating : C36000 or C27000

3) Sealing : Stainless steel wire

2) Plating(电镀):

1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

2) Flange: 镀金0.1um Min 镍底1.4um Min)

3) Prunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

4) Sealer: 镀金0.4um Min 镍底1.4um Min)

3) Mechanical(机器性能):

1) Force(力):

2) Push force to 4.05mm length and measure force: 90gf Min

(压缩到4.05mm的力: 90gf Min)

3) Total stroke(总行程) : 1.50mm

4) Durability(寿命): 10,000 cycle min.

4) Electrical(电性能)

1) Contact resistance(接触抵抗): 30mOhm Max.

2) Voltage rating(额定电压): 36V DC Max

3) Current rating(额定电流): 2.0A

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -			0.0	= ± 0.15		
0.00	= ± 0.10			0.000	= ±		
ANGLE: ±1°				SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				DO NOT SCALE PRINT			
NAME		PGGD PIN		SCALE		1:1	
PG-0.5-2.5-2.0-0.5-1.5-3.7-5.2		DWG NO.		A4		C-101267	
Top-Link Electronics Ltd.		REL		APVD		FIN	
Top-Link Electronics Ltd.		HT TR		1		REV	
A		B		C		D	

USED ON

-

101267-1

PART NUMBER

FIN

Top-Link Electronics

Top-Link Electronics Ltd.

A

B

C

D

4

3

2

1