



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO. C-101276

LDC
-
DIST
-

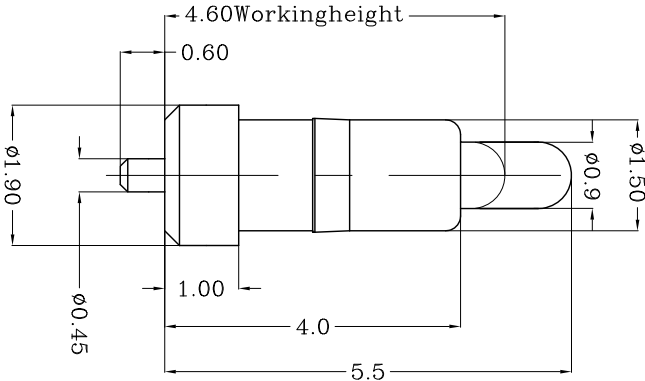

TOP-LINK

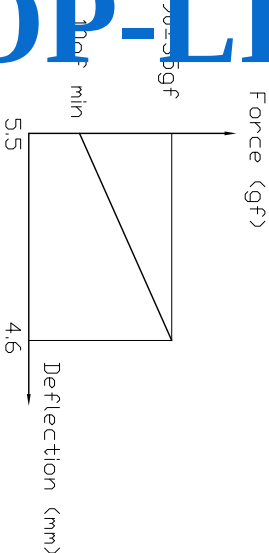

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38, PB2 or CuZn36(C2700).
 - 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: 0.1um Gold plating over min. 1.4um Nickle plating
 - 2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
- 1)Total stroke : 1.0mm
 - 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC

USED ON -

DIMENSIONS IN MM				MATL		HT TR		FIN	
TOLERANCES UNLESS OTHER SPECIFIED						—			
0	= ±-	DWN	APVD	<i>Top-Link Electronics</i>					
0.0	= ±0.15	QIN	Lansing						
0.00	= ±0.10	CHK	REL						
0.000	= ±-	Jin							
ANGLE: ±1°									
SURF TEXTURE: 32/ 				NAME					
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT				POGGO PIN PG-0.45-0.6-1.9-1.0-1.5-4.0-5.5					
SCALE		A4	DWG NO.	C-101276		SHEET 1 OF 1		REV 1	

101276-1

PART NUMBER

A

B

C

D

4

3

2

1