


USED ON
-

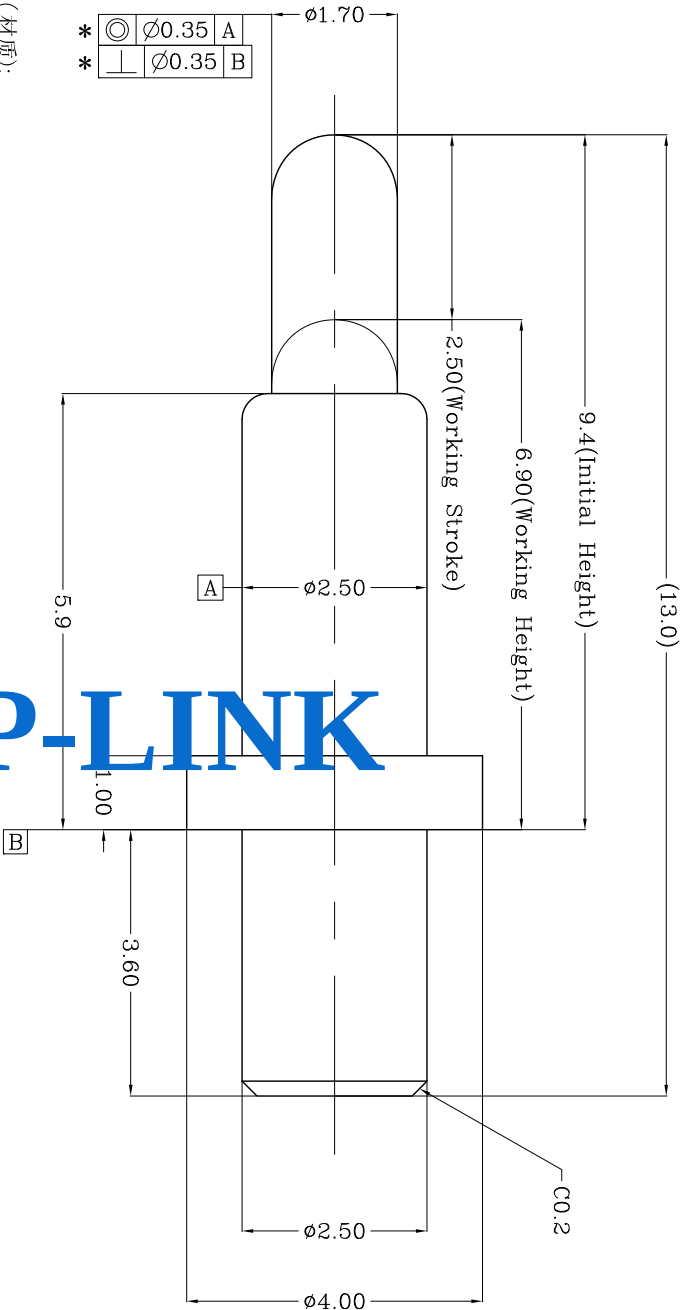

Notes:
△Material(材质):

- 1)Body : C36000
 - 2)Plunge : C36000
 - 3)Spring : Stainless steel wire
- 2 Plating(电镀):
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2)Plunger: Min 0.25um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.25um Min 镍底1.4um Min)
- 3 Mechanical(机械性能):
- 1)Force: 90±20gf per pin at 2.5mm(力:2.5mm的力:90±20gf)
 - 2)Total stroke(总行程) : 3.40mm
 - 3)Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能)
- 1)Contact resistance(接触阻抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 3.0A

TOP-LINK

LDC	-
DIST	-

Update		2012/08/15
NEW		2008/05/19
REVISION RECORD	APVD	DATE

DIMENSIONS IN MM
TOLERANCES UNLESS OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	△1	HT TR	—	FIN	—	△
DWN	Qin	APVD				
CHK	REL					
NAME	PGGD PIN	DWG NO.	C-101416	SHEET 1 OF 1	REV A1	
SCALE	1:1	A4				
PGGD PIN	PG-2.5-3.6-4.0-1.0-2.5-5.9-13.0					
Top-Link Electronics						

101416-1
PART NUMBER