


proposal

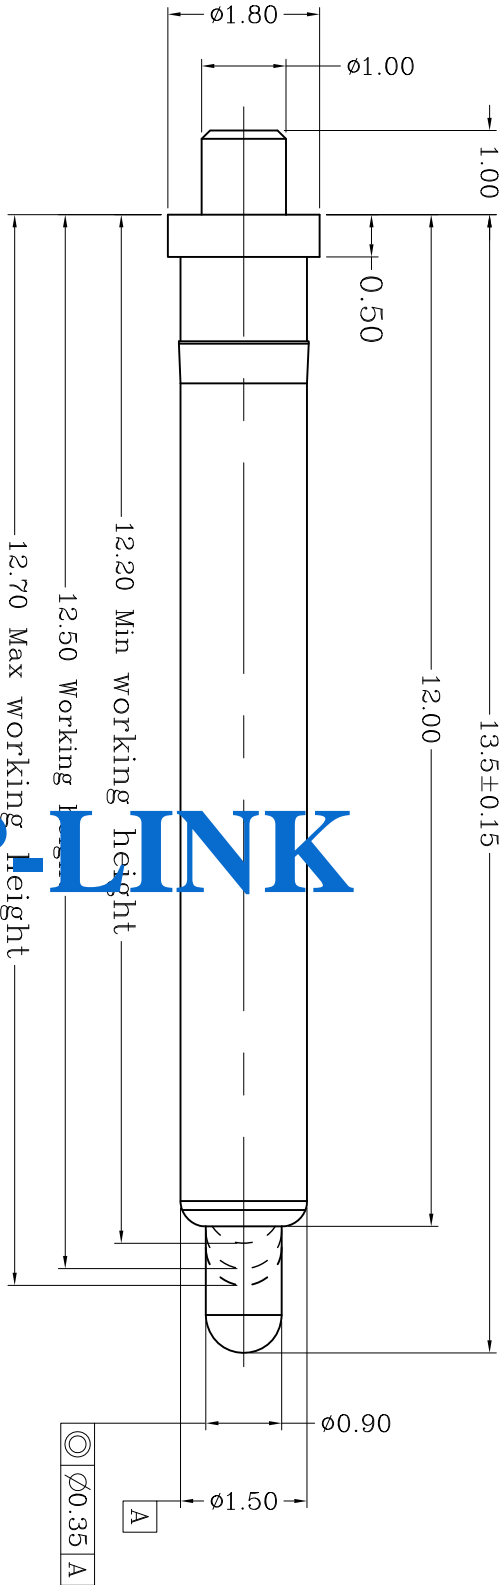

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunge goes downwards and upwards.
 - <2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.
 - Current rating: 2.0A
 - 4 RoHS compliant.

TOP LINK

Table 1 Mechanical performance

Working height	12.5mm	110±20gf <2.1>
Durability	10000cycle	

Item	Part name	Qty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		101423-1	
0.0 = ±0.15	DWN:	Cai wanlu	APVD:			
0.00 = ±0.10	CHK:		REL:		Top-Link Electronics	
0.000 = ±0.05	Angle: ±1°	Name				Top-Link Electronics Ltd.
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.		POGO PIN				
Scale 1:1	Size A4	DWG No.	C-101423	Page 1/1	Rev.	A1