


LDC
-
DIST
-

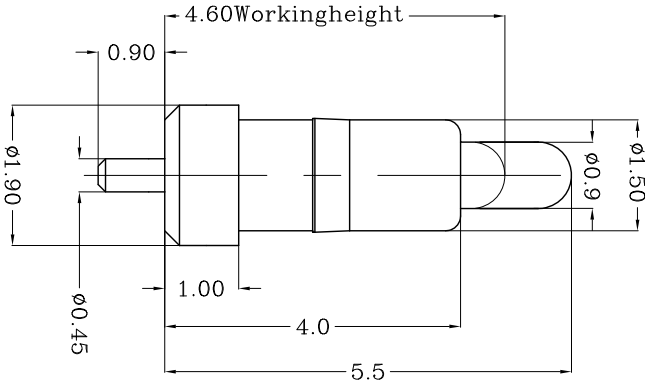

- Notes:
- 1) Material (材质):
- 2) Body: Brass
- 3) Plating: Stainless steel wire
- 4) Plating: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
- 5) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 6) Mechanical (机械性能):
- 7) Force: 90±35gf per pin at 0.9mm stroke (力: 90.9mm 的力: 90±35gf)
- 8) Total stroke (总行程) : 1.20mm
- 9) Reliability (寿命): 10,000 cycle min.
- 10) Electric (电性能)
- 11) Contact resistance (接触抵抗): 30mOhm Max.
- 12) Voltage rating (额定电压): 36V DC Max
- 13) Current rating (额定电流): 2.0A

LTR	REVISION RECORD	APVD	DATE
-	-	-	-

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± .0		
0.0	= ± 0.15		
0.00	= ± 0.10		
0.000	= ± .005		
ANGLE: ±1°			
SURF TEXTURE: 3.2/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	HT TR	FIN	
DWN	APVD		
CHK	REL		
NAME			
PGGD PIN			
PG-0.45-0.9-1.9-1.0-1.5-4.0-5.5			
SCALE			
1:1	A4	DWG NO.	101425
SHEET			
1 OF 1	REV	A	

101425-1

PART NUMBER

USED ON

-