


DWG NO.
C-101461

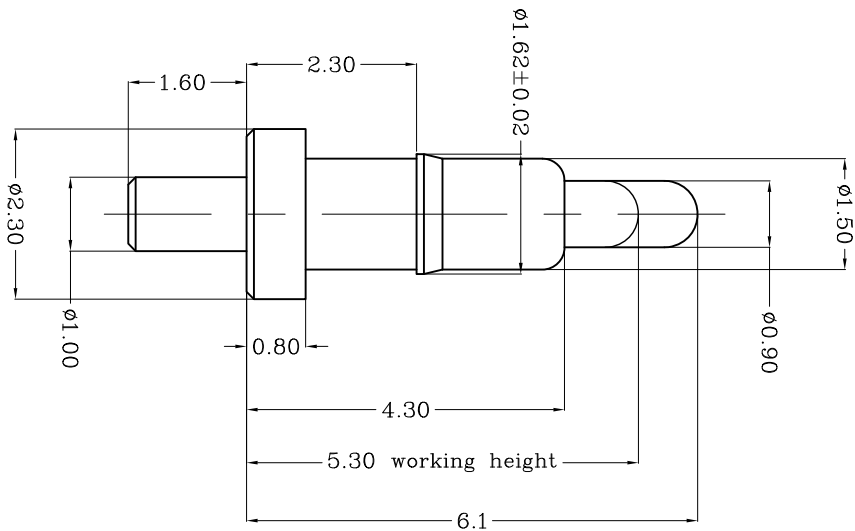

Notes:

Material(材质):

- 2) Plating : Brass
3) Plating : Stainless steel wire
2 Plating(电镀):
Plating: Min 0.1um Gold plating over min. 1.4um Nickel plating
镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)
3 Plunger(机械性能):
1) Total stroke(总行程) : 1.50mm
2)Durability(寿命): 10,000 cycle min.
4 Piezoelectric(电性能)
- act resistance(接触阻抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

TOP LINK

LDC					ANGLE: 11	NAME	PGGD PIN		
-		NEW		2010/11/08	SURF TEXTURE: 32/ V	PG-1.0-1.6-2.3-0.8-1.5-4.3-6.1			
DIST		REVISION RECORD	APVD	DATE	REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	SCALE	A4	DWG NO. C-101461	SHEET 1 OF 1
-		LTR				1:1			REV A1

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL	HT TR	FIN
0	$\pm .015$	DWN	APVD	— <i>A</i>
0.0	$\pm .010$	QIN		
0.000	$\pm .010$	REL		
0.0000	$\pm .010$	CHK		

101461-1
PART NUMBER

USED ON

—