

proposal

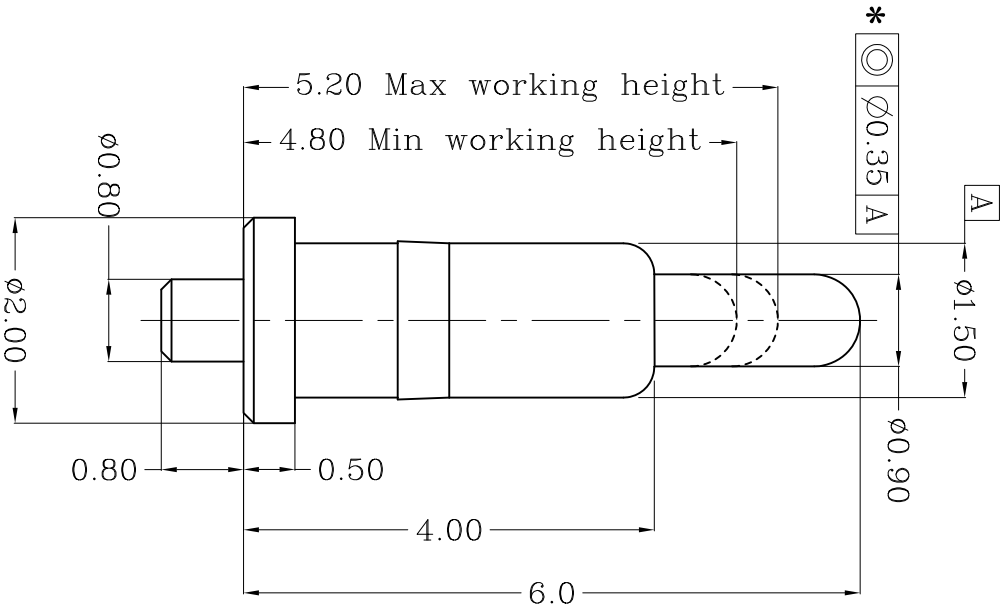


Table 1 Mechanical performance		
Max working height	5.20mm	80gf min<2.1>
Min working height	4.80mm	200gf Max
Durability	10000cycle	

- Not
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Warning: Working height are not permitted to be less than the working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.
 - Current rating: 2.0A
 - 4 RoHS compliant.

TOP LINK

Item	Part name	Qty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Rev.	NEW	2011/09/22
Revision record.		
Date.		

Top-Link Electronics Ltd		Type	Unit	Weight	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm	_____	
DWN: Qlm		APVD:	Top-Link Electronics Top-Link Electronics Ltd.		
CHK:		REL:			
Name POGO PIN					
Scale 1:1		Size A4	DWG No. C-101536	Page 1/1	Rev. 1