


proposal

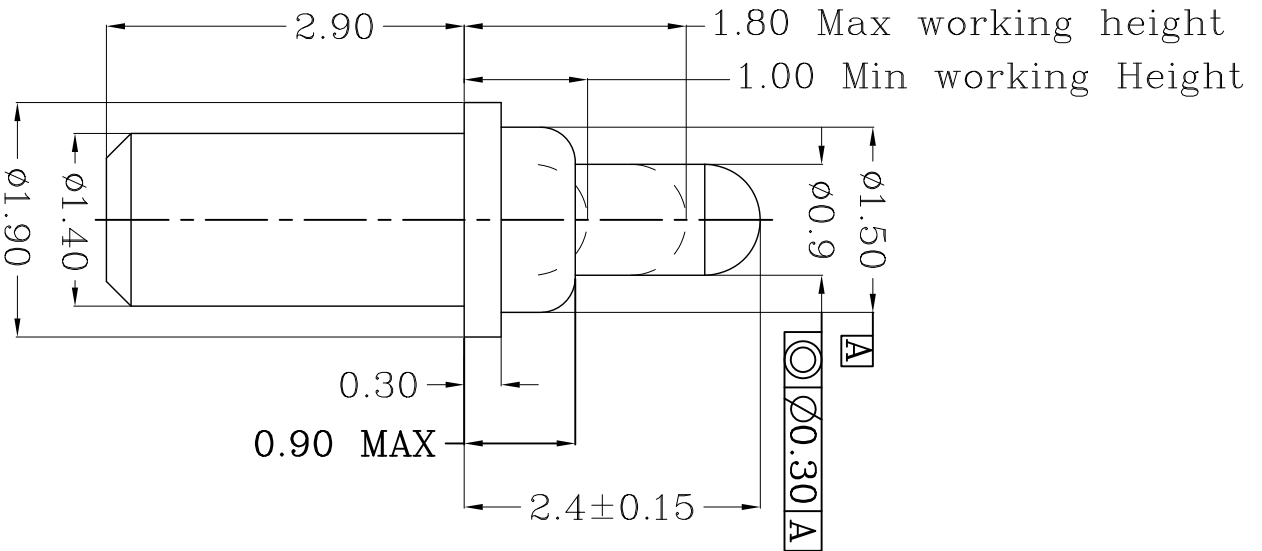

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 4 Electrical performance
- 5 Resistance:50mOhm Max.
- 6 Current rating: 2.0A
- 7 RoHS compliant.

Table 1 Mechanical performance

working height	1.20mm	80gf min<2.1>
Durability		10000cycle

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	JERRY	APVD:		
0.0 = ± 0.15		CHK:		REL:		
0.00 = ± 0.10		Top-Link Electronics Top-Link Electronics Ltd.				
0.000 = ± 0.005						
Angle: ±1°						
SURF. TEXTURE: REMOVE BURRS.						
BREAK SHARP EDGES		Name POCO PIN				
R0.05 MAX DO NOT SCALE PRINT.						
Scale	Size	DWG No.	C-101763	Page	1/1	Rev. 2

Top-Link Electronics Ltd.

101763-1
PART NUMBER