


proposal

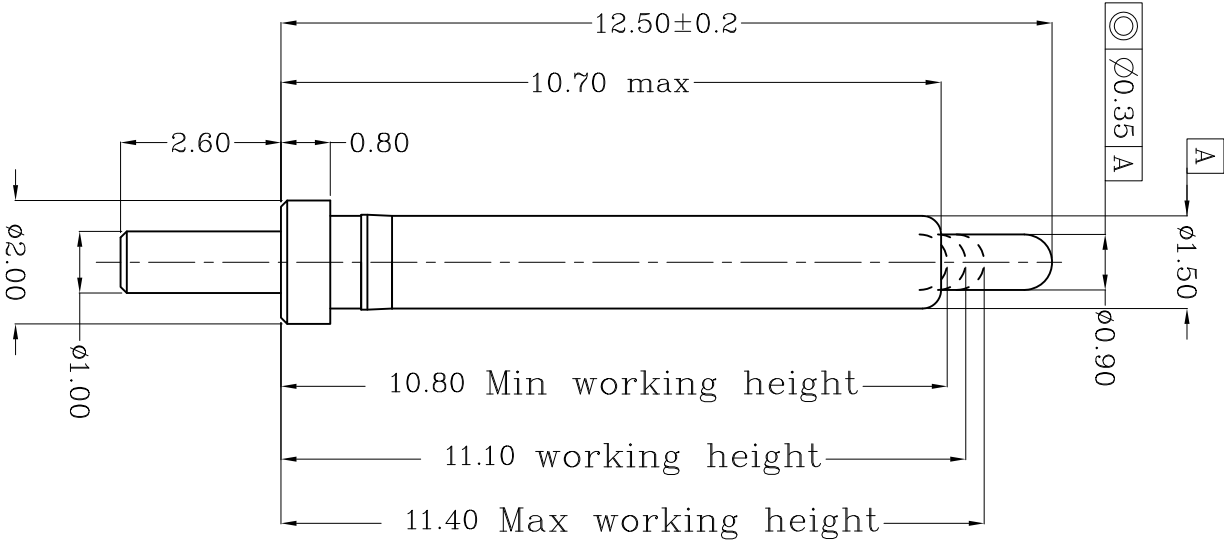

TOP-LINK

Notes:

- Dimensions shall be interpreted per ASME Y14.5M.
- Mechanical performance(See the table 1)
- <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- RoHS compliant.

Table 1 Mechanical performance

working height	11.1mm	120±30gf <2.1>
Durability	10000cycle	

Item	Part name	Qty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Gold plating over Nickel plating
2	Plunger	1	Leaded Brass	Gold plating over Nickel plating
3	Spring	1	Stainless steel wire	_____
4				
5				

Rev.	Revision record.	Date.
1	NEW	2013/08/13

Top-Link Electronics Ltd.			
TOLERANCES UNLESS OTHER SPECIFIED			
0.0	±0.15	APVD:	Top-Link Electronics Ltd.
0.00	±0.10	CHK:	
0.000	±0.05	REL:	
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.			
Name		POGO PIN	
Scale	Size	DWG No.	Page
1:1	A4	C-101769	1/1

PART NUMBER
101769-1