


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.: 10110031602

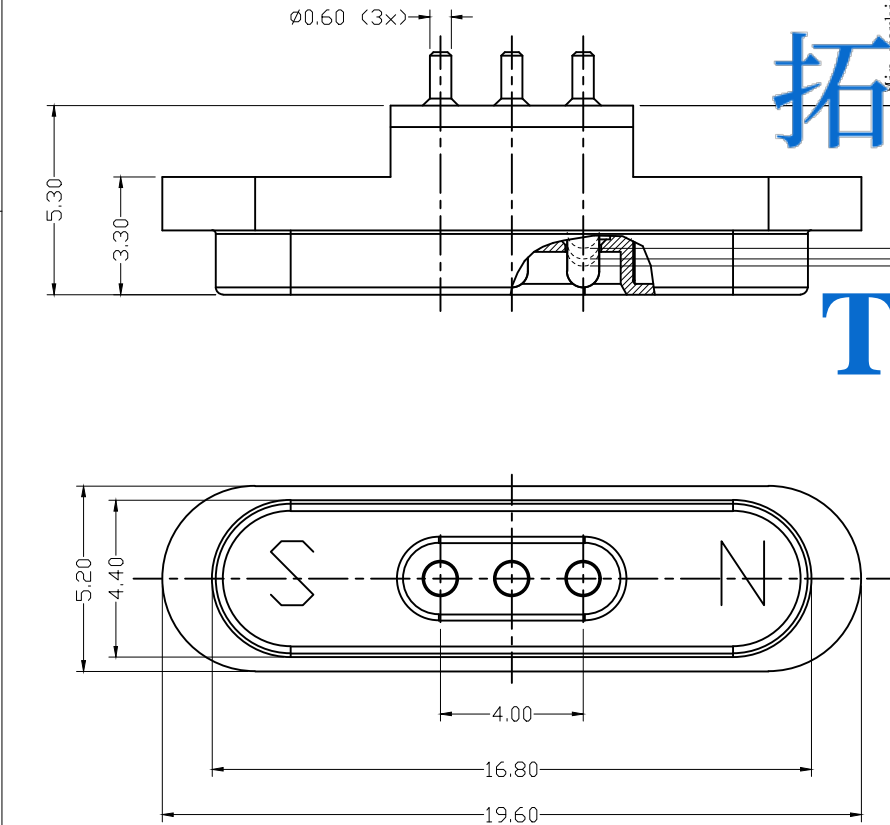

拓普联科
TOP-LINK

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	
5	Magnet	2	NdFeB	Nickel plating

Table 1 Mechanical performance		
Working height	4.30mm	45±15gf <2.1>
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning:Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Operating voltage: 36VDC MAX.
Current rating: 2.0A
- 4 RoHS compliant.

DIST

A	NEW	2015/03/19
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type Customer drawing	Unit mm		Weight	
TOLERANCES UNLESS OTHER SPECIFIED		DWN: Minos	APVD:		<div><i>top-Link</i></div> <div><i>Electronics</i></div> <div>Top-Link Electronics Ltd.</div>	
0. = ± - 0.0 = ± 0.20 0.00 = ± 0.15 0.000 = ± - Angle: ±1°		CHK:	REL:			
SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.		Name POGO PIN CONNECTOR				
Scale 1:1		Size A4	DWG No. 10110031602		Page 1/1	Rev. A

top-Link Top-Link Electronics Ltd.