

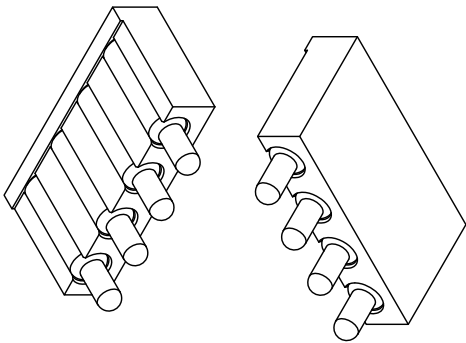




TOP-LINK

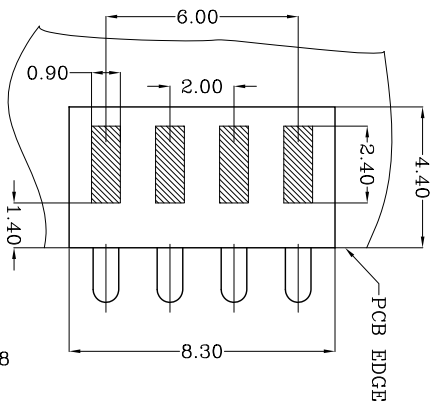

Application status 1
IMPORTANT: The recommended thickness of solder paste is 0.10mm



Application status 2
Recommended PCB Layout & Application

100001-4

PART NUMBER

- 2 Plating:
- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)

- 3 Mechanical:
- Spring force: Min 0.2N with 0.3mm stroke
1.1 +0.30N/-0.20N with 1.0mm stroke.
- Total stroke(总行程): 1.40mm
- Durability(寿命): 10,000 cycle min.

Notes:

Material(材质):
Housing: LCP Color Black.
Contact: Brass
Spring : Stainless steel wire

LDC
-
DIST
-

变更材质	2010/05/12
改Body结构	2007/12/04
REVISION	
RECORD	
APVD	
DATE	

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.10
0.00 = ±
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	1	HT TR	—	FIN	—	ANGLE
DWN	QIN	APVD				
CHK	REL					
NAME	BATTERY POGO CONNECTOR 4 POSITIONS RIGHT ANGLE	DWG	NO.	C-100001	SHEET	REV
SCALE	1:1	A4			1 OF 1	E

Top-Link
Electronics Ltd.

USED ON

-