
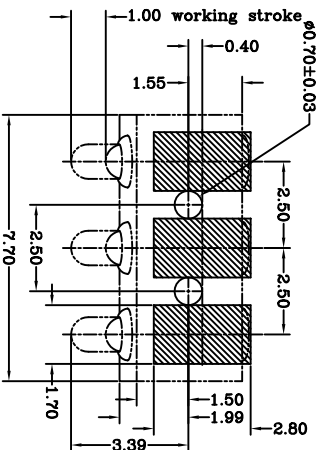



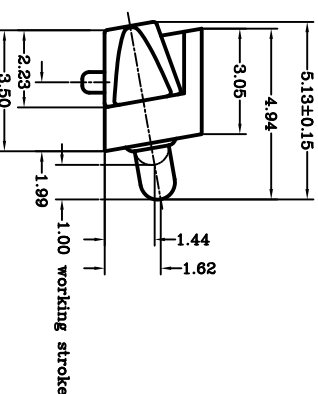




LDC
DIST
-



Recommended P.C.B.
layout (Component Side)

- Notes:
- 1) Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black. (UL94V-0)
 - 2) Plating: Plating: 0.4um Au over 1.4um Ni
Plating body: 0.1um Au over 1.4um Ni.
 - 3) Mechanical
1) Total stroke : 1.5mm
2) Force: 135±30 gf at 1.0mm stroke
3) Durability: 10,000 cycle min.
 - 4) Electrical
1) Contact resistance: 30mOhm Max.
2) Operating voltage: 36VDC Max.

Update remark	800718/17
REVISION	
RECORD	
APVD	
DATE	

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
DWN	APVD	
Benny	Lansing	
CHK	REL	
Andy		
NAME	BATTERY CONNECTOR 3 POS. WITH PILLAR	
SCALE	1:1	
DWG	C-100005	
NO.		
SHEET	1 OF 1	
REV		

100005-3
PART NUMBER

USED ON
-