








THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
100257



TOP-LINK

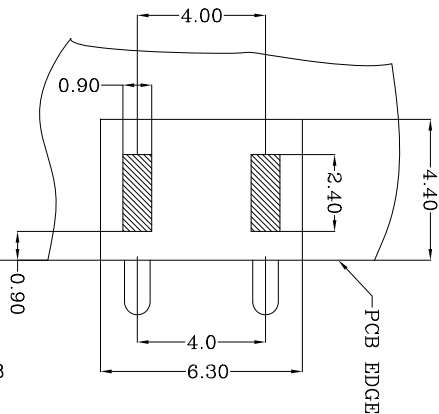

Application status 1
焊锡膏, 推荐锡膏厚度为0.10mm
IMPORTANT: The recommended thickness of solder paste is 010mm



Application status 2
Recommended PCB Layout & Application

- Notes:
- Material(材质):
Housing: LCP Color Black.
Contact: Brass
Spring : Stainless steel wire
- 2 Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镀底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镀底1.4um Min)
- 3 Mechanical:
Spring force: Min 20gf with 0.3mm stroke
110±30gf with 1.0mm stroke.
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.

LDC
-
DIST
-

变更材质		2010/05/12
NEW		2009/01/15
L TR	REVISION RECORD	APVD DATE

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.10		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
NAME	PGGD CONNECTOR 2 POSITIONS RIGHT ANGLE	SCALE	1:1
DWN	Qin	APVD	A4
CHK	REL	DWG	ND. 100257
Top-Link Electronics Ltd.			
PART NUMBER			
100257-2			
FIN			
— V			
SHEET 1 OF 1			
REV B			

USED ON

-