


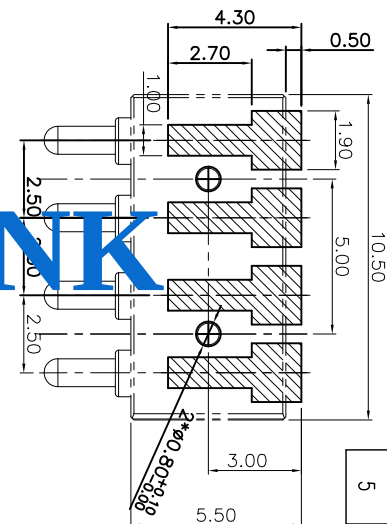
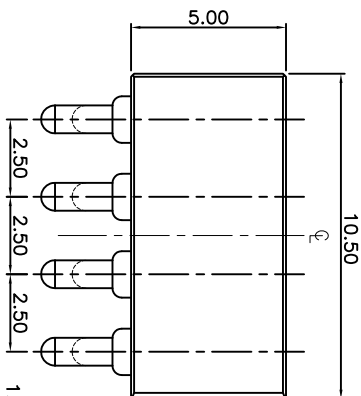
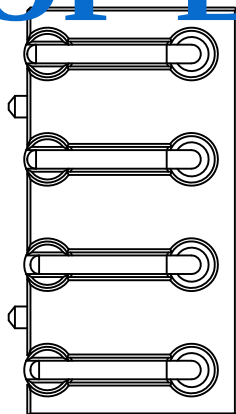


proposal

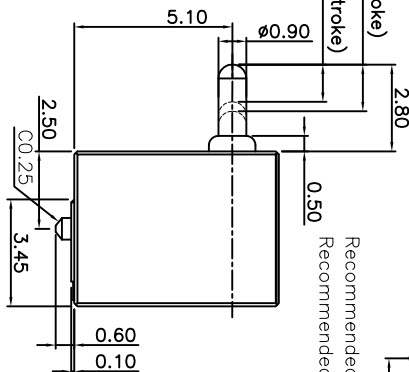

1.50(Max. Stroke)
1.20(Working Stroke)

Recommended P.C.B layout (Component Side)
Recommended thickness of steel stencil : 0.15mm

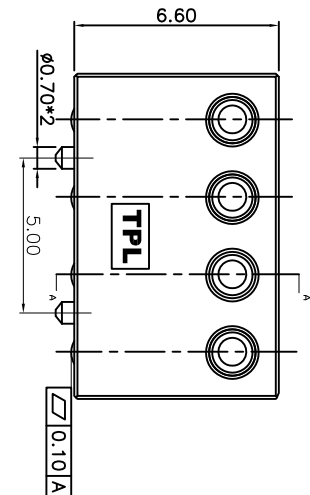


TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per [ASME Y14.5M](#).
- 2 Mechanical performance (See the table 1)
- 3 <2.>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
- Resistance: 30mOhm Max. Current rating: 5.0A
- 4 Packaging Spec. Conformance to EIA 481
- 5 RoHS compliant.

Table 1 Mechanical performance		
working stroke	1.2mm	120±30g
Durability	10000cycle	

100385-4	PART NUMBER
----------	-------------



Item	Part name	Qty/Ea	Material	Finish
1	HSG	1	High temp/Plastic UL94 V-0 Color Black	_____
2	Body	4	Leoded Brass	Gold plating over Nickel plating
3	Plunger	4	Leoded Brass	Gold plating over Nickel plating
4	Spring	4	Stainless steel wire	_____
5	Pod	4	Brass	Tin plating over Nickel plating

Type	Unit	Weight
Customer drawing	mm	

DMN: Cai wanlu	APVD:	
CHK:	REL:	

Name
Customer drawing

Scale 1:1	Size A4	DWG No. C-100385	Page 1/1	Rev. B
--------------	------------	---------------------	-------------	-----------