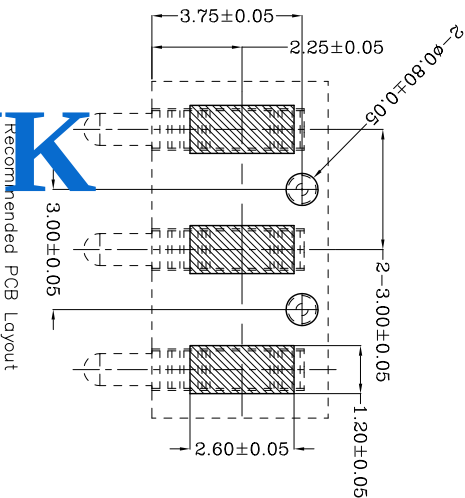
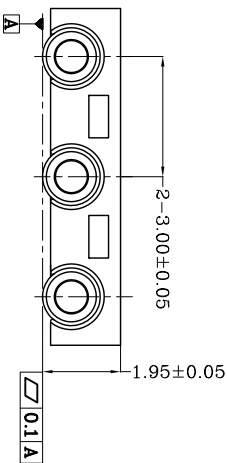


USED ON

1 Material(材质):

Housing: LCP, UL94 V-0 Color Black.

Contact: Brass

Spring : Stainless steel wire

2 Plating:

Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Force: 120 ± 25 gf per pin at 1.0mm stroke
(力: 下压1.0mm的力: 120 ± 25 gf)
Total stroke(总行程): 1.40mm

4 Electrical (电性能)

- 1) Contact resistance (接触电阻): 30mOhm Max
- 2) Voltage rating (额定电压): 36V DC Max
- 3) Current rating (额定电流): 2.0A

100778-3
PART NUMBER

	NEW		2012/01/10
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATL		HT TR	—	FIN	
0	= ±		DWN	APVD	Top-Link <i>Electronics</i>			Top-Link Electronics Ltd.	
0.0	= ±0.15		qin						
0.00	= ±0.10		CHK	REL					
0.0000 = ±									
ANGLE: ±1°									
SURF. TEXTURE: 3.2/ 				NAME					
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT				SCALE	A4	DWG NO.	C-100778	SHEET 1 OF 1	REV 2
				PGDGO CONNECTOR 3 POSITIONS RIGHT ANGLE PGC-1.44-6.4-RA-3P-3.0PH					