

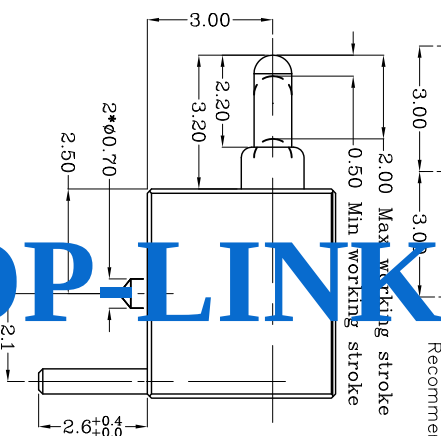
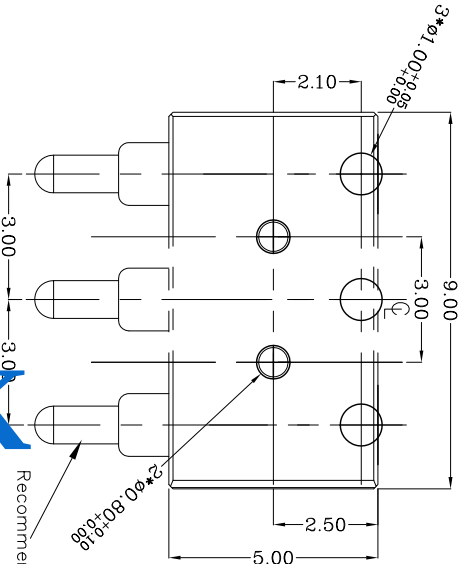
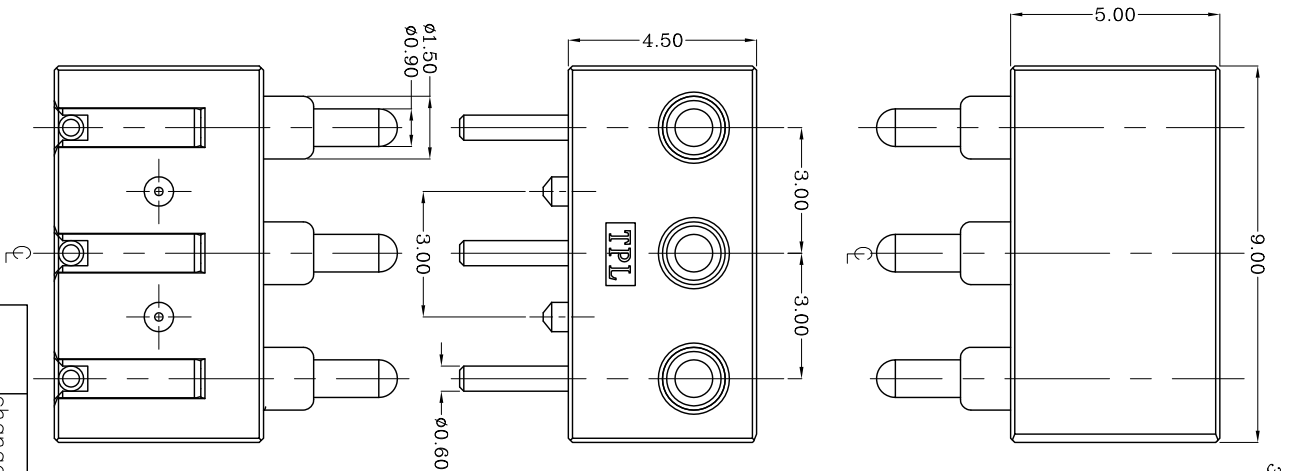



proposal

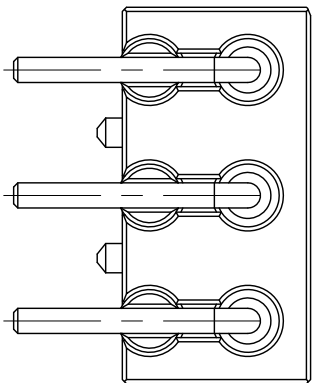

Notes:
1 Dimensions shall be interpreted per ASME Y14.5M.
2 Mechanical performance (See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working stroke are not permitted to be more than Max working stroke.
3 Electrical performance
Resistance: 50mOhm Max.
Current rating: 1.0A
4 RoHS compliant.

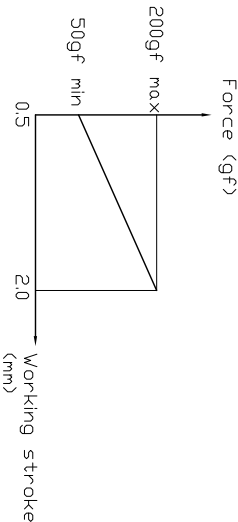

Item	Part name	Qty/Ea	Material	Finish
1	HSG	1	High temp. Plastic UL94 V-0 Color Black	
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	
5				

DIST

4

3

2

1

A

B

C

D

Rev.	Revision record.	Date.	Top-Link Electronics Ltd.	Type	Unit	Weight	PART NUMBER
	change the tolerance: 2.6±0.04	2013/08/09	Electronics UNLESS TOLERANCES SPECIFIED	Customer drawing	mm		1101024-3
	update	2013/08/08	0.0 = ±0.15 0.00 = ±0.10 0.000 = ±0.005	DWN: JERRY	APVD:		
	NEW	2013/08/06	Angle: ±1° SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.	CHK: REL:			
			POGO PIN CONNECTOR	Name	Scale	Size	DWG No.
					1:1	A4	C-1101024
							Page 1/1
							Rev. 3

Top-Link Electronics Ltd.