




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

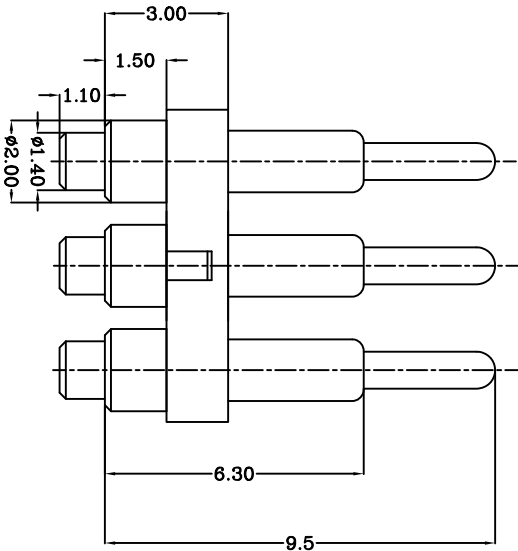


DWG NO.
C-110499

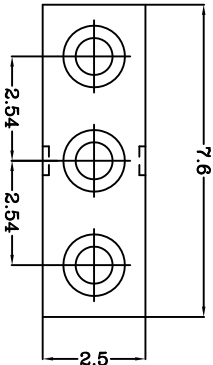

TOP-LINK

Ø1.5
Ø0.9

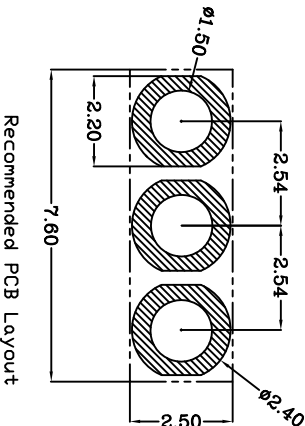

Recommended PCB Layout

USED ON
-

Notes:
1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black.

2 Mechanical demands:
Contact: Brass
Plating Plunger: Min 0.4µm Au over 1.4µm Ni
Plating Body: Min 0.1µm Au over 1.4µm Ni.

LDC
-
DIST
-

NEW	2009/04/01
REVISION	
RECORD	
APVD	
DATE	

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
DWN	APVD	
CHK	REL	
Jim		
NAME	BATTERY	POGO CONNECTOR 3 POSITIONS
SCALE	1:1	A4
DWG	NO.	C-110499
SHEET	1 OF 1	REV A

110499-3

PART NUMBER

Top-Link
Electronics Ltd.

4

3

2

1