


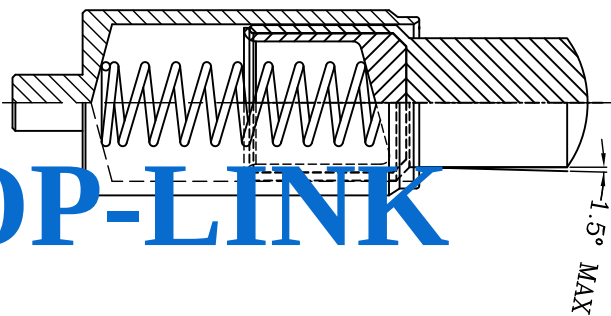


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO. C-101605

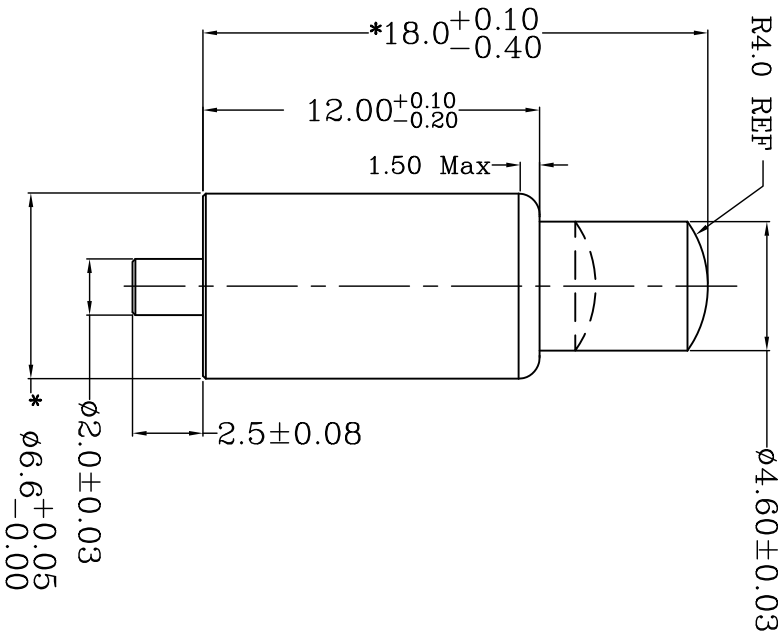

TOP-LINK

Notes:

Material:

1)Plunger & Body :Brass C3604

2)Spring : Stainless steel wire

3)Wedge and spring holder: LCP

2 Plating

1)Body Min 0.125um Au over 1.4um Nickel plating

2)Plunger Min 0.2um Au over 1.4um Nickel plating

3 Mechanical


1)Total stroke : 4.0±0.5mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30 mΩ max

2)Rate voltage & Current: 12V DC 3A

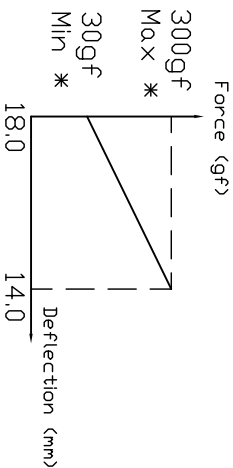

LDC	-
DIST	-

更新	2012/07/04	APVD	DATE
NEW	2010/12/06	REVISION	RECORD
LTR			

DIMENSIONS IN MM	
TOLERANCES UNLESS	
OTHER SPECIFIED	
0 = ±	
0.0 = ±0.15	
0.00 = ±0.10	
0.000 = ±	
ANGLE: ±1°	
SURF TEXTURE: 32/	
REMOVE BURRS, BREAK	
SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

MATL	HT TR	FIN	NAME
1	-	-	POGO PIN
DWN	APVD	REL	PG-2.0-2.5-6.6-12.0-4.60-18.0
CHK			
SCALE	A4	DWG NO.	C-101605
1:1			
		SHEET	REV
		1 OF 1	3

101605-1
PART NUMBER

Top-Link
Electronics Ltd.

USED DN

-