


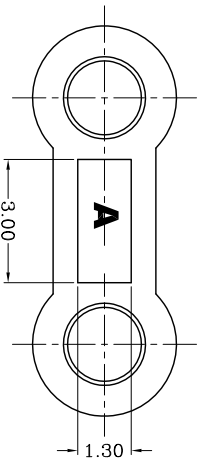



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

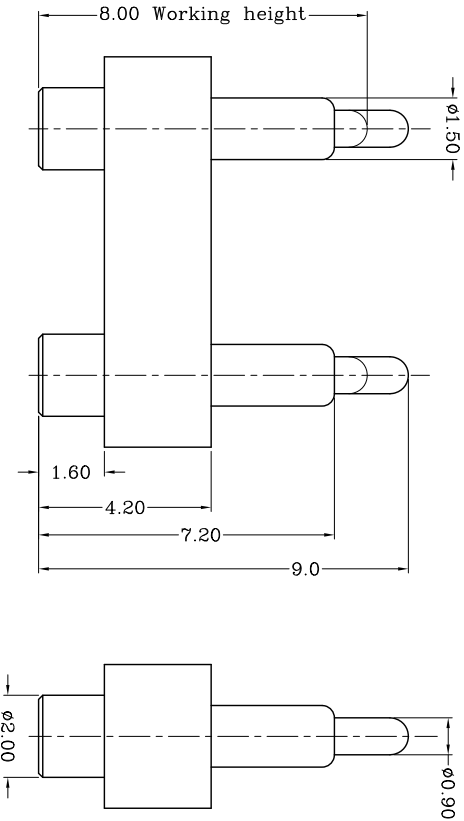

DWG NO.
C-100040

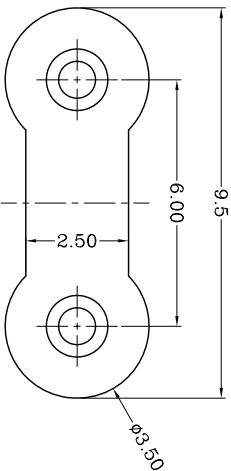

TOP-LINK

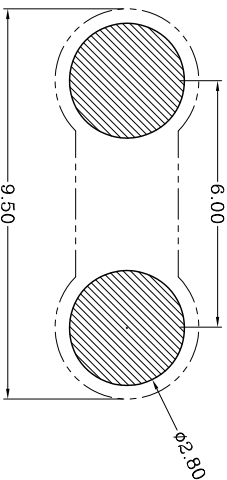

Recommended PCB Layout

Notes:

1 Material(材质):

Housing: High temp.Plastic, UL94 V-0 Color Black.

Contact: Brass

Spring : Stainless steel wire

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Total stroke(总行程): 1.70mm

Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

Contact resistance(接触阻抗): 30mOhm Max.

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

USED ON

-

LDC

-

DIST

-

4

3

2

1

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°

SURF TEXTURE: 32/
REMOVE BURRS. BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL

1

HT TR

-

FIN

-

DWN

Qin

APVD

-

REL

Top-Link
Electronics

Top-Link
Electronics Ltd.

CHK

REL

Top-Link
Electronics

Top-Link
Electronics Ltd.

NAME

PGGD CONNECTOR 2 POSITIONS
PGC-1.5-9.0-R-2P-6.0PH

SCALE

1:1

A4

DWG

ND. C-100040

SHEET

1 OF 1

REV

E