


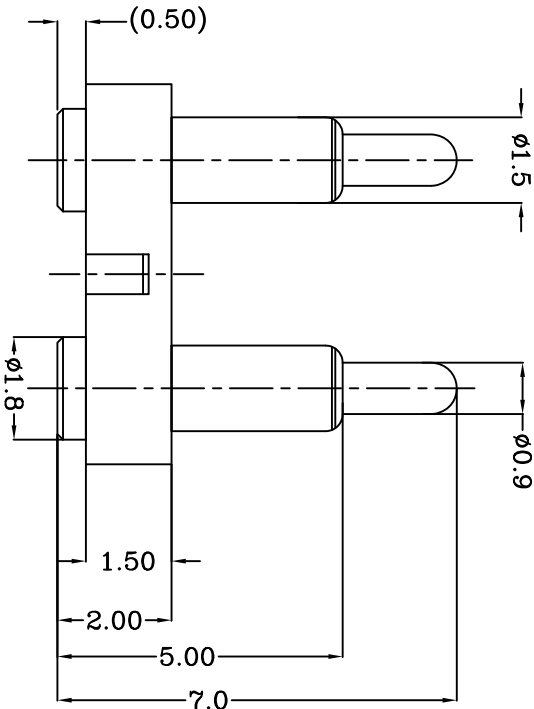
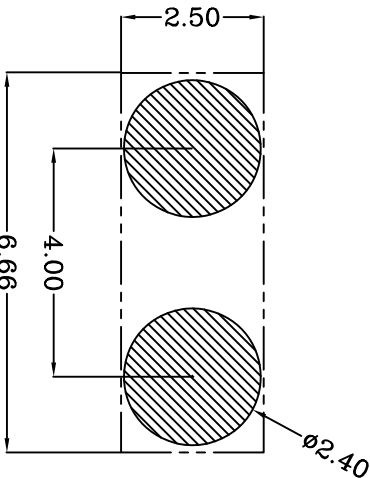


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

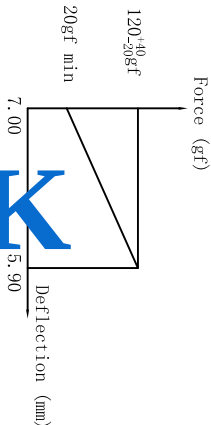

DWG NO.
C-100052

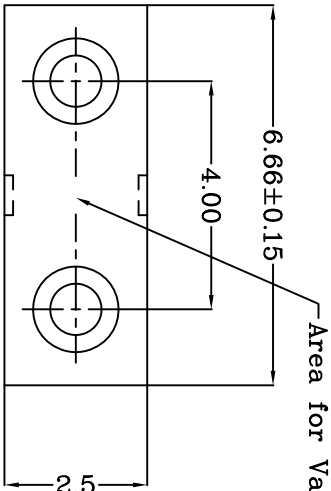

TOP-LINK

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black.
 - 2 Mechanical demands:
Plating Plunger: Au plating over Ni plating
Plating Body: Au plating over Ni plating
 - 3 Mechanical
1) Total stroke : 2.0mm
2) Durability: 10,000 cycle min.
 - 4 Electrical
1) Contact resistance: 30mOhm Max.
2) Operating voltage: 36VDC MAX.
 - 5 Packing: Reel Tape

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0	= ± -
0.0	= ± 0.15
0.00	= ± 0.10
0.000	= ±

ANGLE: ± 1°

SURF TEXTURE: 3.2/

REMOVE BURRS
SHARP EDGES NO.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
DWN	AMPD	AMPD
Qin	Lansing	Qin
CHK	REL	CHK
Jin		Jin
NAME	BATTERY POGO CONNECTOR 2 POSITIONS	
SCALE	PGC-1.5-7.0-R-2P-4.0PH	
1:1	A4	NO.
		C-100052
		SHEET
		1 OF 1
		REV
		2

LOC

DIST

-

4

3

2

1

USED ON

-