


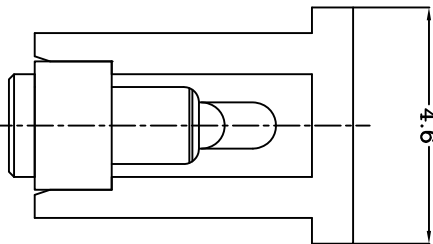
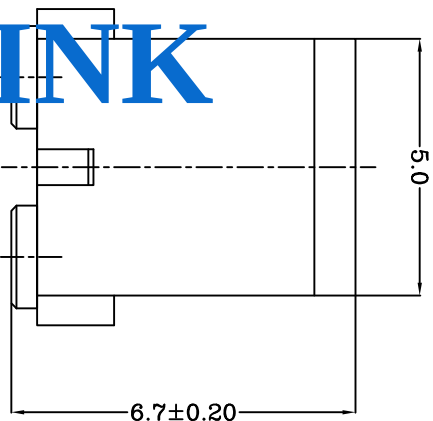
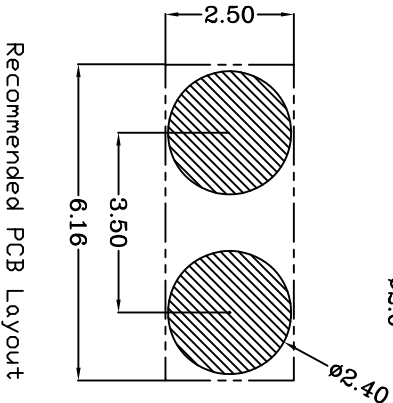


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

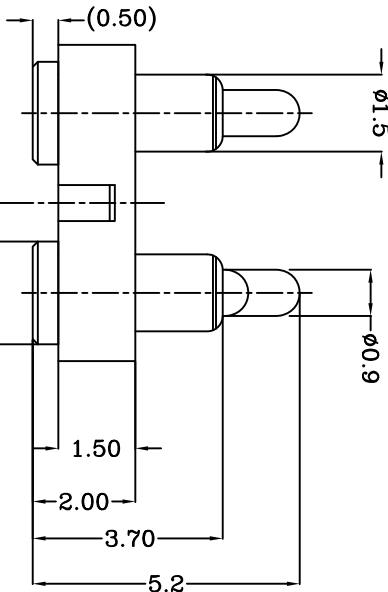

DWG NO.
C-100091-2

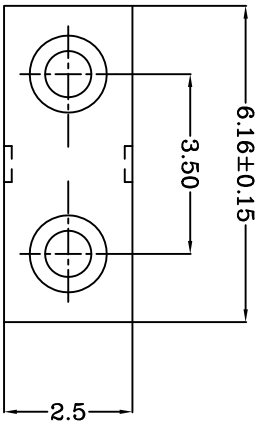

TOP-LINK

Notes:
Material, Housing: PA 4,6 (30% Glass Filled)
Color Black.
Contact: Brass
Mechanical demands:
Spring force: 135 ±30 with 1.0mm stroke.
Plating Plunger: Min 0.5um Au over 1.5um Ni
Plating Body: Min 0.1um Au over 1.3um .

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°

SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL



HT TR

FIN



DWN

Benny

APVD

REL

Top-Link
Electronics Ltd.

NAME BATTERY POGD CONNECTOR 2 POSITIONS

PGC-1S-5.2-R-2P-3.5PH

SCALE

1:1

A4

DWG

NO. C-100091-2

SHEET

1 OF 1

REV

B

LTR

REVISION

RECORD

APVD

DATE

2007/07/04

Add cap-001

LDC

-

DIST

-

USED ON

-