

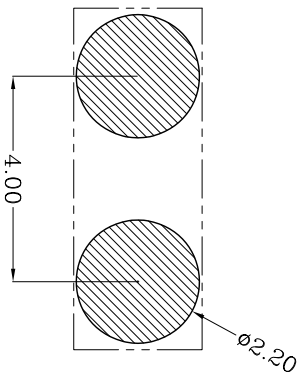
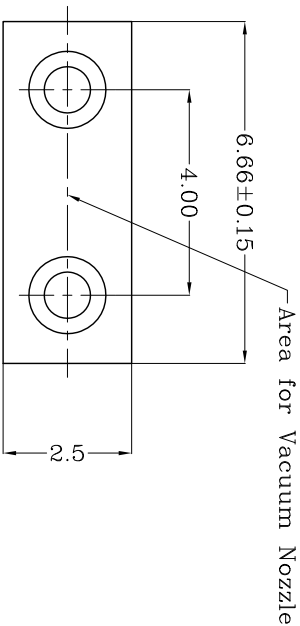


DWG NO.
C-100155



Recommended solder patse thickness is 0.10 mm
Recommended PCB Layout

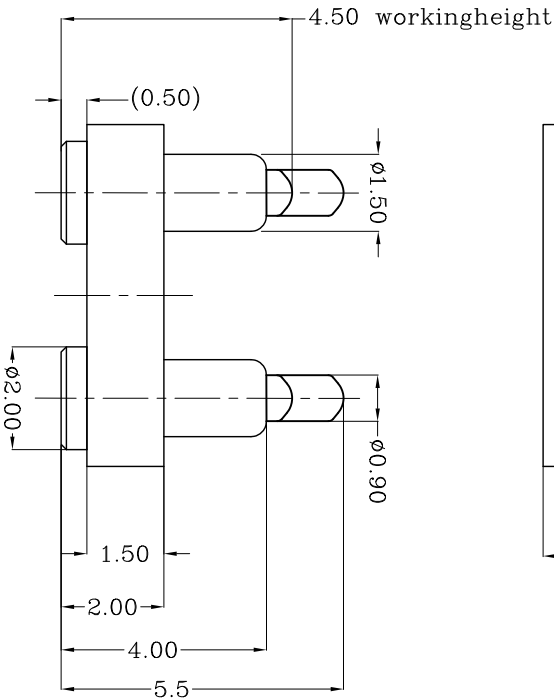

Notes:
1)Material(材质):
Housing: PA 46 (30% Glass Filled) Color Black.
Contact: Brass
Spring :Stainless steel wire

- 2 Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)

TOP-LINK

USED DN
-

100155-2

PART NUMBER

MATL	HT TR	FIN
1	-	-

Qin		<i>Top-Link</i>	Top-Link
CHK	REL	<u>Electronics</u>	Electronics Ltd.

NAME POGD CONNECTOR 2 POSITIONS
PGC-1.5-5.5-R-2P-4.0PH

SCALE	A4	DWG NO.	SHEET 1 OF 1	REV A
1:1	A4	C-100155	1	A

update	remark		2007/12/26
LTR	REVISION RECORD	APVD	DATE

LDC	DIST
-	-

4

3

2

1