
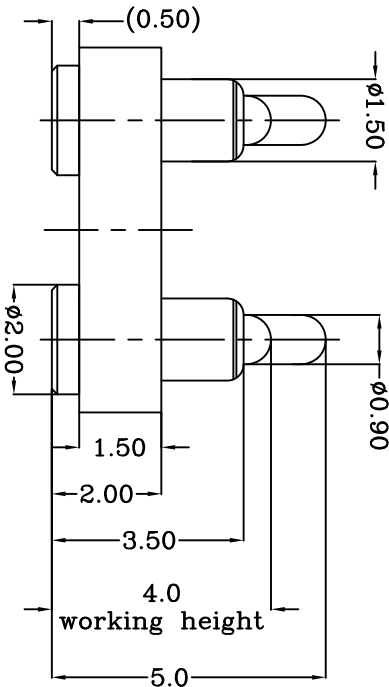
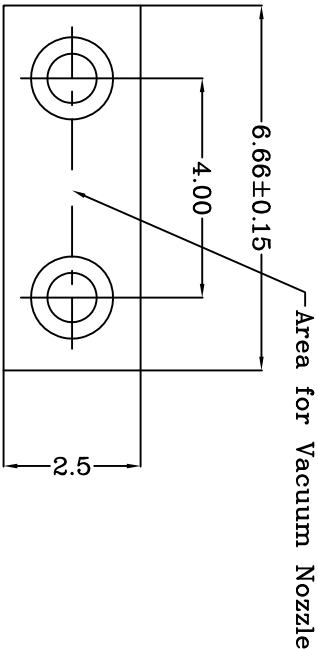



Recommended solder patse thickness is 0.10 mm
Recommended PCB Layout

TOP-LINK

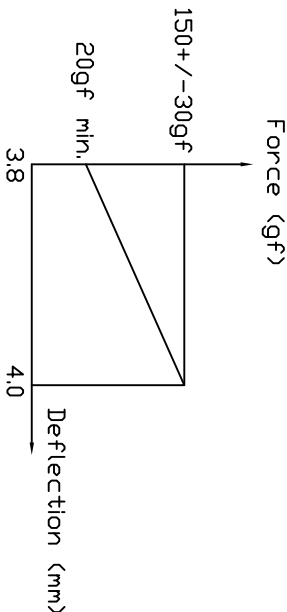

- Notes:
1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.
Contact: Brass
2 Mechanical demands:
Plating Plunger: 0.4um Au over 1.4um Ni
Plating Body: 0.1um Au over 1.4um Ni.

USED ON

-

LDC	-
DIST	-

update remark	
REVISION	
RECORD	
APVD	
DATE	2007/12/26

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±			0	= ±		
0.0	= ±0.15			0.00	= ±0.10		
0.000	= ±			0.000	= ±		
SURF TEXTURE: 32/ REMOVED				ANGLE: ±1°			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				SURF FINISH: 32/ REMOVED			
DD NOT SCALE PRINT				DD NOT SCALE PRINT			
MATL	1	HT TR	—	FIN	—	✓	
DWN	Benny	APVD	Lansing	Top-Link Electronics Ltd.			
CHK	Andy	REL					
NAME BATTERY POGO CONNECTOR 2 POSITIONS							
PGC-1.5-5.0-R-2P-4.0PH							
SCALE	A4	DWG	NO.	C-100219	SHEET 1 OF 1		
1:1					REV C		