
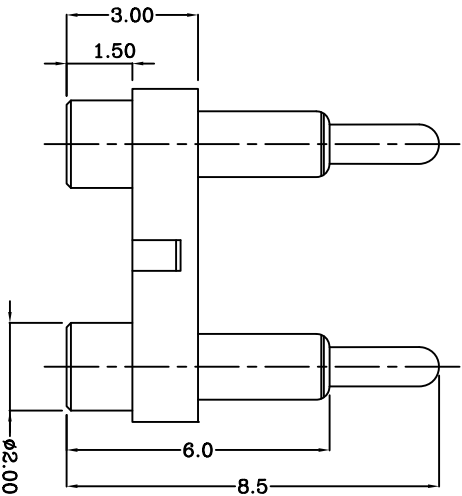
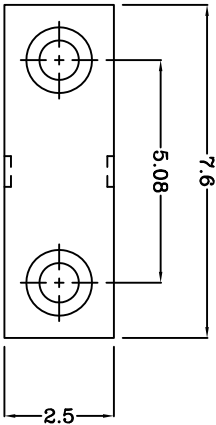



TOP-LINK

Recommended solder paste thickness is 0.10 mm

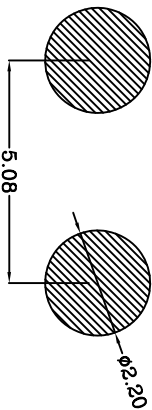

Notes:
1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black. (UL94V-0)

2 Mechanical demands:
Contact: Brass
Plating plunger: 0.4um Au over 1.4um Ni
Plating body: 0.1um Au over 1.4um Ni .
Force is 125±30gf at 1.0 mm stroke.

USED ON

-

100271-2

PART NUMBER

HT TR — FIN — V

MATL DWN QIN APVD Lansing Top-Link Electronics Ltd.
CHK JIN REL Top-Link Electronics Ltd.

NAME BATTERY CONNECTOR 2 POS.

PGC-15-8.5-R-2P-508PH

SCALE 1:1 A4 DWG NO. C-100271

REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DD NOT SCALE PRINT

DIMENSIONS IN MM
TOLERANCES UNLESS OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
SURF TEXTURE: 32/
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DD NOT SCALE PRINT

DATE

APVD

REVISION RECORD

LTR

LDC

-

DIST

-

4

3

2

1