

LDC	-
DIST	-


4

3


2

1


- Notes:
- 1) Material(材质):
Housing: PA 4.6 (30% Glass Filled) Color Black.
Contact: Brass
Spring : Stainless steel wire
- 2) Plating:
1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3) Mechanical:
Force: 65±15gf per pin at 0.5mm stroke
85±20gf per pin at 0.8mm stroke
Total stroke(总行程): 1.00mm
Durability(寿命): 10,000 cycle min.
- 4) Electrical(电性能)
1) Contact resistance(接触阻抗): 50mOhm Max.
2) Voltage rating(额定电压): 36V DC Max
3) Current rating(额定电流): 2.0A

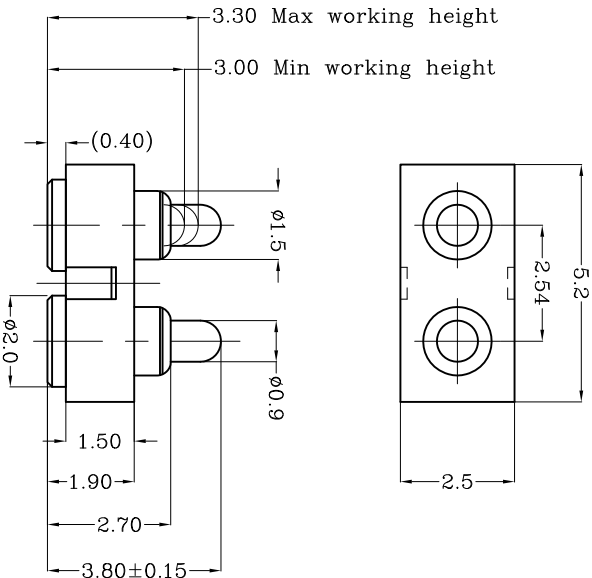

TOP-LINK



Recommended PCB Layout

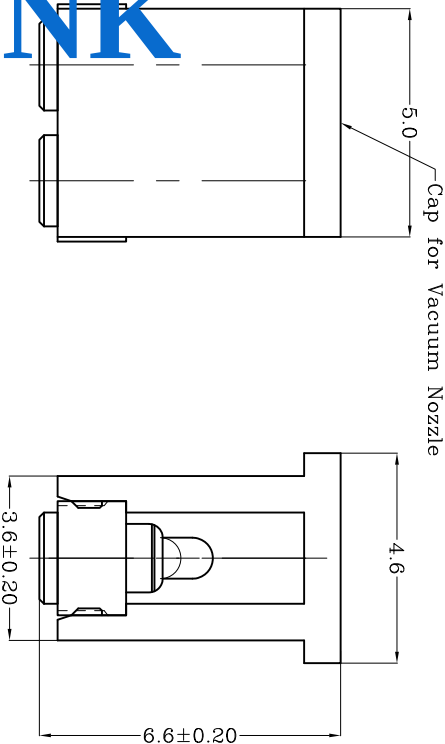

USED ON

100580-2
PART NUMBER

MATL	1	HT TR	—	FIN	—
DWN	Qin	APVD			
CHK		REL			

Top-Link
Electronics L td.

0.000	- 1°										
ANGLE:	±1°										
SURF TEXTURE:	32/										
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX											
DO NOT SCALE PRINT											
NAME	POGO CONNECTOR 2 POSITIONS										
	PGC-1.5-3.8-R-2P-2.54PH										
SCALE	A4	DWG									
1:1		C-100580									
			SHEET								
			1 OF 1								
				REV							
				3							