

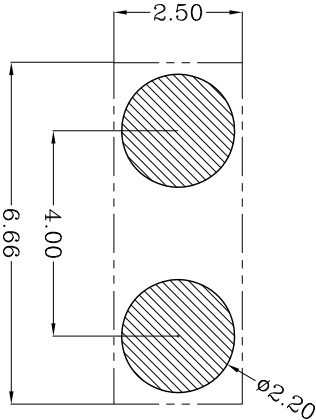
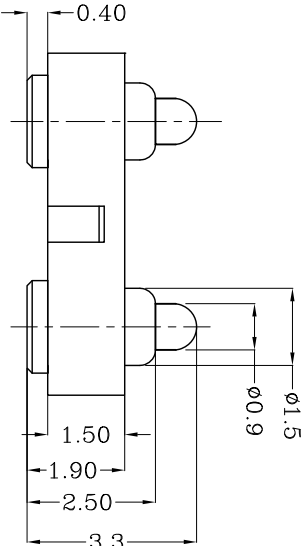


DWG NO.
C-100587

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

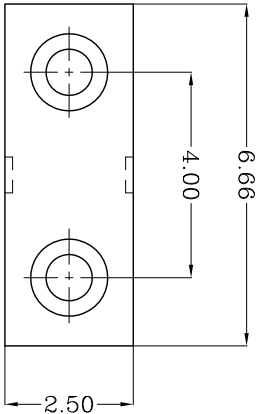

Recommended PCB Layout



TOP-LINK

Notes:

1)Material(材质):

Housing: PA 4,6 (30% Glass Filled)Color Black.

Contact: Brass

Spring :Stainless steel wire

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)

LDC	-
DIST	-

L TR	new	10"/02/04
REVISION RECORD	APVD	DATE

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT	TR	FIN	PART NUMBER
DWN QIN	APVD	REL	Top-Link Electronics Ltd.	100587-2
NAME	POGO CONNECTOR 2 POSITIONS	PGC-1,5-3,3-R-2P-4,0PH	SHEET 1 OF 1	REV 1
SCALE	A4	DWG NO.	C-100587	
1:1				

USED ON

-