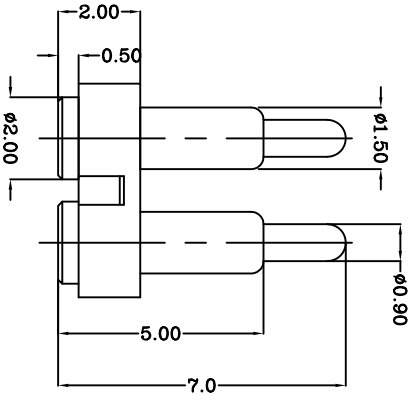




Notes:

1) Material(材料):
Housing: High temp. Plastic, UL94 V-0 Color Black.
Contact: Brass
Spring : Stainless steel wire

2 Plating:

1) Body: Min. 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镀底1.4um Min)
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镀底1.4um Min)

3 Mechanical:

Total stroke(总行程): 2.00mm
Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

Contact resistance(接触阻抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

USED ON

-

100644-2

PART NUMBER

DIMENSIONS IN MM		TOLERANCES UNLESS		OTHER SPECIFIED	
0	= ±	0.0	= ±0.15	0.00	= ±0.10
0.000	= ±	0.000	= ±	0.000	= ±

SURF TEXTURE: 32/		REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		DD NOT SCALE PRINT	
ANGLE: ±1°		NAME		PGGD CONNECTOR 2 POSITIONS	
SCALE		A4		DWG NO.	
1:1		C-100644		SHEET 1 OF 1	

Recommended PCB Layout

LDC

-

DIST

-

4

3

2

1