


TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 Electrical performance
- 4 Resistance:100mOhm Max.Current rating: 1.0A
- 5 Packaging Spec.Comformance to EIA 481

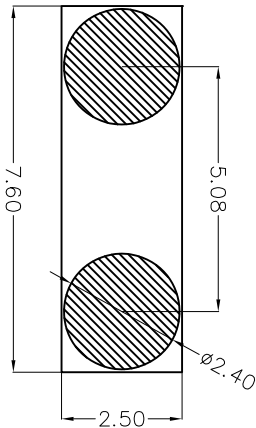

Recommended PCB Layout

Table 1 Mechanical performance		
Working height	6.00mm	25±15gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5				

Top-Link Electronics Ltd.		Type	Unit	Weight		
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm			
0.0	±0.15	DWN:			<div>Top-Link Electronics</div> <div>Top-Link Electronics Ltd.</div>	
0.00	±0.10	Qin Zuozhong				
0.000	±0.05	CHK:				
Angle: ±1° SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.D0 NOT SCALE PRINT.		Name		Customer drawing		
Scale	Size	DWG No.	C-100743		Page	Rev.
1:1	A4				1/1	A