
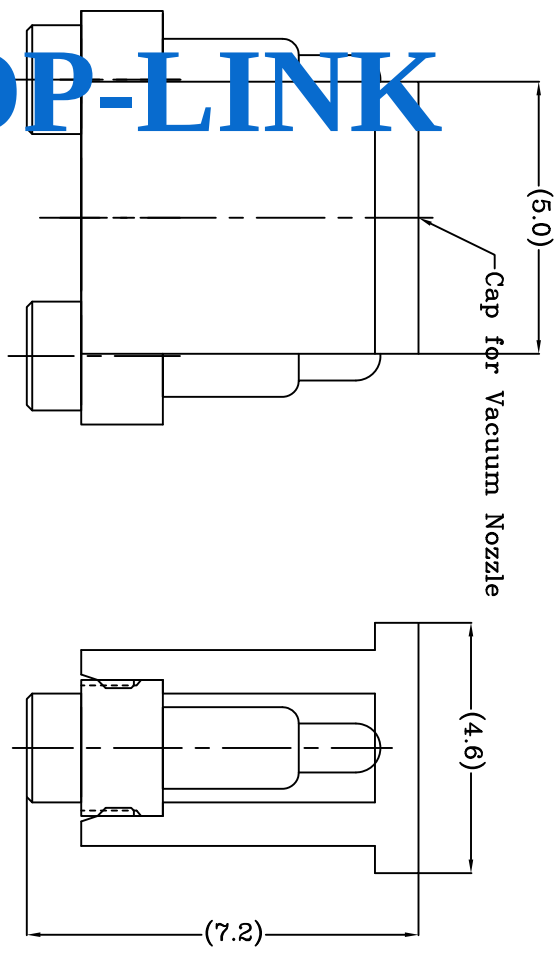
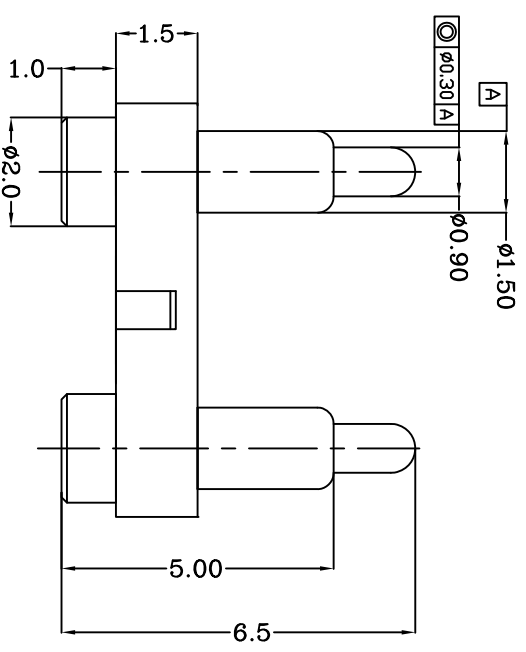


proposal

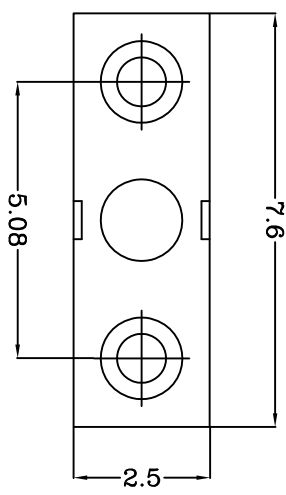

TOP-LINK

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Table 1 Mechanical performance		
Working height	5.50mm	125±30gf
Durability	10000cycle	

- Notes:
- 1 Demensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 Packaging Spec.Comformance to EIA 481
 - 5 RoHS compliant.

DIST

DIST

Rev.	NEW	Date.
Revision record.	2012/11/28	

Top-Link Electronics Ltd.		Type	Unit	Weight
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm	
0.0	±0.15	DWN:	APVD:	
0.00	±0.10	CHK:	REL:	
0.000	±0.05	Angle:		
SURF. TEXTURE:		Name	Customer drawing	
REMOVE BURRS.		Scale	Size	DWG No.
BREAK SHARP EDGES		1:1	A4	C-100924
SCALE PRINT.				Page 1/1
				Rev. 2

Top-Link Electronics
Top-Link Electronics Ltd.

100924-2
PART NUMBER