
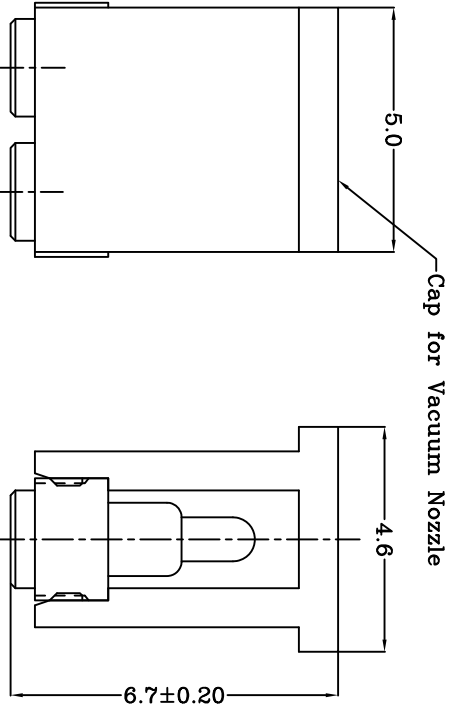

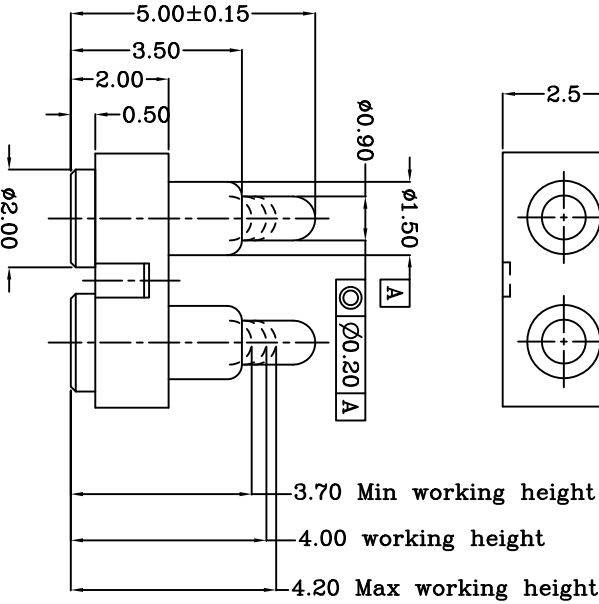


proposal



TOP-LINK

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards
 - <2.2>Warning:Working height are not permitted to be less than Min working height
 - 3 Electrical performance
 - <3.1>Current rating: 2.0A
 - <3.2>Voltage rating: 36VAC/DC
 - <3.3>Dynamic Resistance:30mOhm Max (between max and min working height)
 - <3.4>Insulation Resistance:100M0hm minimum
 - 4 Environmental performance
 - <4.1>RoHS compliant
 - <4.2>Salt Spray:48h Min
 - <4.3>Operating Temperature range: -40°C~+85°C
 - <4.4>Withstanding Higt Temperature:260°C/10Sec
 - 5 Packaging:Carrier tape

Table 1:Mechanical performance		
Working Height	4.0mm	60±15gf
Durability	10000 Cycles Min.	

Top-Link Electronics Ltd		
TOLERANCES UNLESS OTHER SPECIFIED		
0.0	= ± 0.15	
0.00	= ± 0.10	
0.000	= ± 0.05	
Angle: #1		
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.		
Type	Customer drawing	Unit mm
DWN:	Alon	APVD:
CHK:		REL:
NAME	Pogo PIN Connector	
Scale	Size A4	Part NO. 10101021714
1:1		Page 1/1
		Rev: XA

top-link