






THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

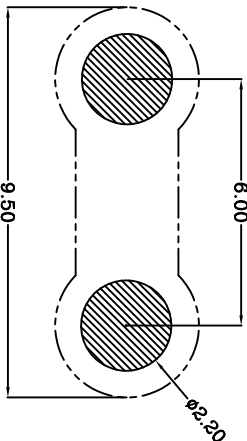

DWG NO.
C-110641

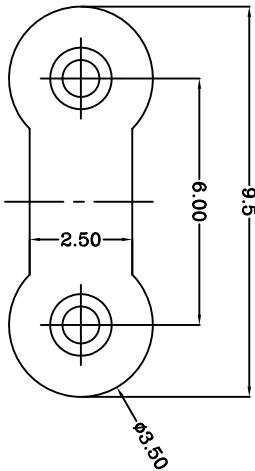


Recommended PCB Layout

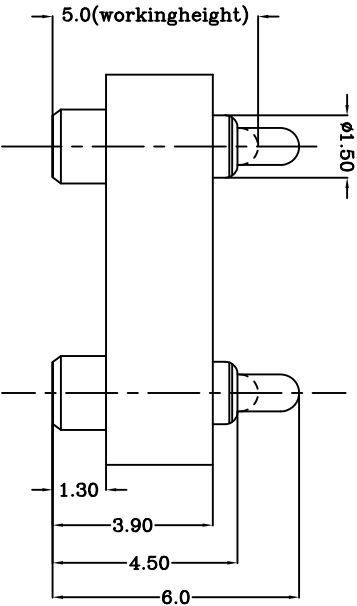

TOP-LINK

Notes:

- Material(材质):
Housing: PA 4.6 (30% Glass Filled) Color Black.
Contact: C36000 & C27000
Spring : Stainless steel wire
- Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镀底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镀底1.4um Min)
- Mechanical:
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.
4 Electrical(电性能)
Contact resistance(接触抵抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

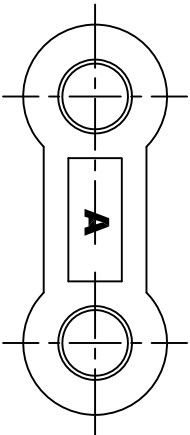

LDC	-
DIST	-

LTR	NEW	REVISION RECORD	APVD	DATE
				2010/09/20

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±	-		0.0	= ±0.15		
0.00	= ±	0.10		0.000	= ±		
ANGLE: ±1°							
SURF TEXTURE: 32/							
REMOVE BURRS, BREAK							
SHARP EDGES R0.05 MAX							
DO NOT SCALE PRINT							
NAME				PGGD CONNECTOR 2 POSITIONS			
SCALE				PGC-1.5-6.0-R-2P-6.0PH			
1:1				A4			
A4				NO.			
C-110641				SHEET			
1 OF 1				REV			
A				A			

PART NUMBER

110641-2

USED ON

-