



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101009

LOC
-
DIST
-

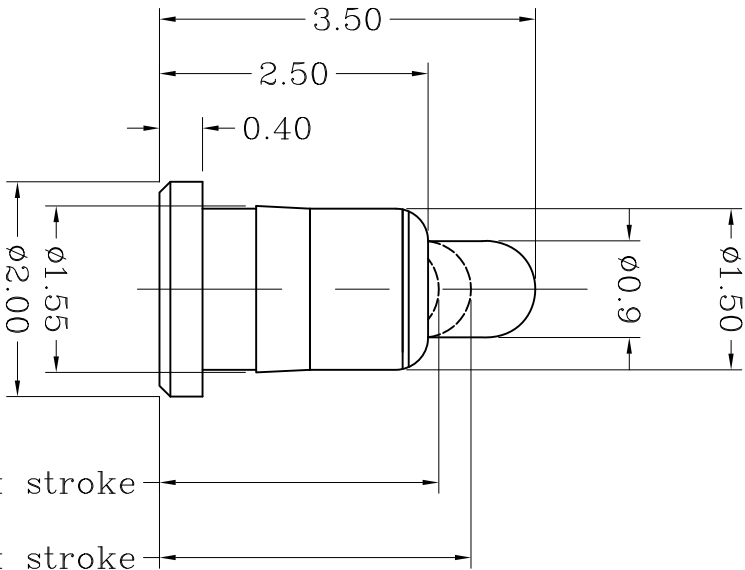

Notes:

- 1) Material: 1)Plunger & Body : CuZn36 Pb3, HO2 (C36000) or CuZn39 PB3 or CuZn38 PB2.
- 2) Springs : Stainless steel wire
- 2 Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
- 2)Plunger: Min 0.2um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
- 1)Tension stroke : 0.9mm
- 2)Force : 100±30 gf at 0.6mm stroke.

TOP-LINK

USED ON

-

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±-			0.0	= ±0.15		
0.00	= ±0.10			0.000	= ±		
ANGLE: ±1°							
SURF TEXTURE: 3.2/							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX							
DO NOT SCALE PRINT							
MATL		HT TR	—	FIN	— ✓		
DWN		APVD		<i>Top-Link Electronics</i> Top-Link Electronics Ltd.			
Qln		REL					
CHK							
NAME		POGO PIN					
		PG-2.0-0.4-1.5-3.5					
SCALE		DWG NO.	C-101009		SHEET	1 OF 1	REV A
1:1	A4						