


DWG NO.
C-101014

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC
-
DIST
-

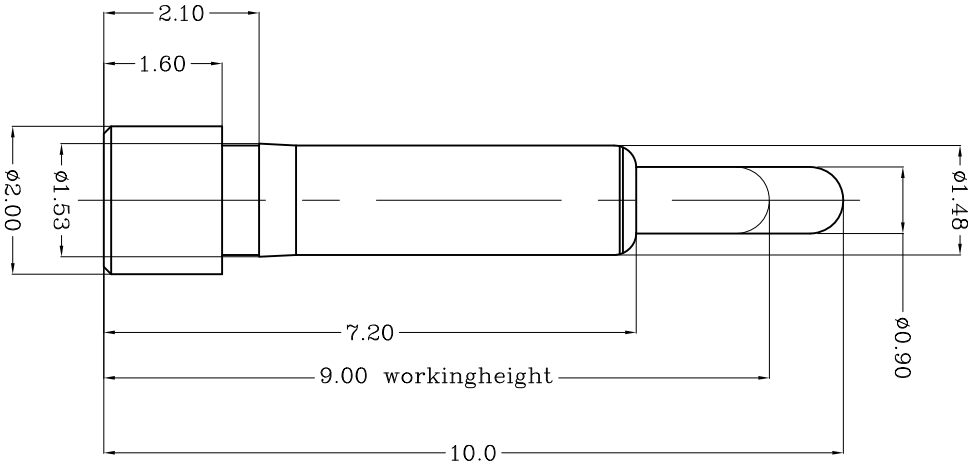

Notes:
△ Material(材质):

- 1)Body : Brass
- 2)Plunger : Brass
- 3)Spring : Stainless steel wire

- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body 镀金0.1um Min 镍底1.4um Min)
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger 镀金0.4um Min 镍底1.4um Min)

3 Mechanical(机械性能):

- 1)Force: 100±25gf per pin at 1.0mm stroke (力: 100±25gf 的力: 100±25gf)
- 2)Total stroke(总行程) : 2.70mm
- 3)Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能)
 - 1)Contact resistance(接触抵抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 2.0A

TOP LINK

update remark	
REVISION RECORD	
L TR	
APVD	
DATE	2007/09/10

DIMENSIONS IN MM	
TOLERANCES UNLESS OTHER SPECIFIED	
0	= ± -
0.0	= ±0.15
0.00	= ± 0.10
0.000	= ±
ANGLE: ±1°	
SURF TEXTURE: 3.2/	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

MATL	1	HT TR	—	FIN	—	✓
DWN	Qin	APVD	Top-Link Electronics Top-Link Electronics L td.			
CHK		REL				
NAME						
POGO PIN						
PG-2.0-1.6-1.5-7.2-10.0						
SCALE	1:1	A4	DWG NO.	C-101014	SHEET	REV
					1 OF 1	B

USED ON

-

101014-1

PART NUMBER